

PROJECT DATE

COMMENTS



IN STOCK



ENERGY CHART

SIZE feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1x4	3000	24	125
	3750	30	125
	4500	36	125
2x2	3000	24	125
	3750	30	125
	4500	36	125
2x4	3000	24	125
	4500	36	125
	5625	45	125

ORDERING LOGIC EX: TCBN-14

FAMILY	SIZE	OPTIONS
TCBN	14 1x4	EM Emergency Backup: 90 minutes
	22 2x2	OS Occupancy Sensor
	24 2x4	

TCBN TROFFER CENTER BASKET NARROW LED

The TCBN series is a wattage and color temperature selectable LED luminaire with a high diffusion, single center lens. This troffer is fully recessed and fits into standard T-Grid ceiling.

- Hospitality
- Commercial
- Indoor

PHYSICAL

Material	Gauge Steel
Mounting	Recessed and Surface
Lens	Polycarbonate Diffuser
Finish	White Powder Coat

PERFORMANCE

Warranty	5 years
Certifications	UL, cETLus, DLC Premium, RoHS Compliant
Rated Life	L70 50,000 hours
Operating Temperature	Ambient Temperature Not Exceeding 40°C (104°F)
CCT	3500K, 4000K, 5000K
CRI	80+

ELECTRICAL


Wattage	24W, 30W, 36W, 45W
Voltage	120-277V
Dimmable	0-10V

ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY) EX: TCBN-SMK14


FAMILY	ACCESSORIES
TCBN	SMK14 1x4 Surface Mount Kit
	SMK22 2x2 Surface Mount Kit
	SMK24 2x4 Surface Mount Kit
	RC Remote Control for Occupancy Sensor

DIMENSIONS

2X2

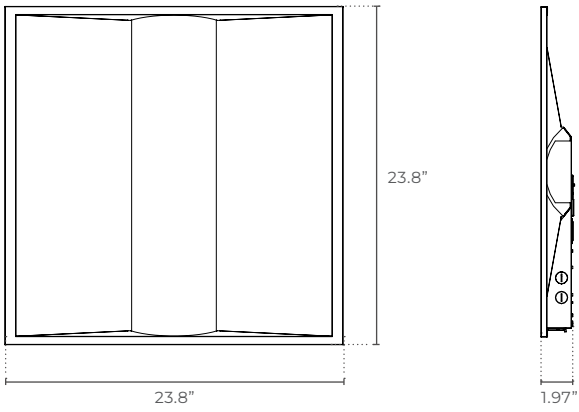

2X4

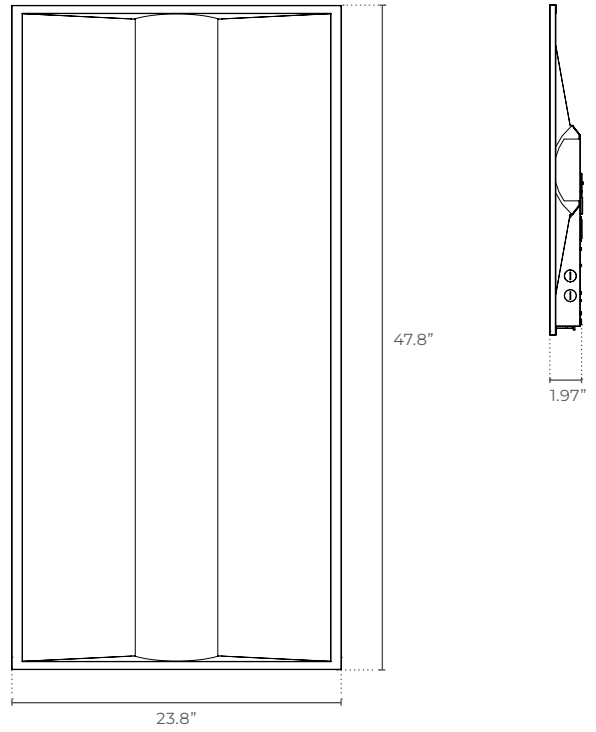

ADDITIONAL IMAGERY

