



PROJECT DATE

COMMENTS



PHYSICAL


Mirror	Copper Free Silver
Frame	Aluminum
Mounting	Aluminum Keyhole
Finish	Black Brushed, Black Powdered
Source	LED
CCT	Single CCT, Field Selectable 3CCT, Field Selectable 5CCT, Tunable White: 2700K, 3000K, 4000K, 5000K, 6000K
CRI	80+

PERFORMANCE

Warranty	5 year
Certification	UL, CE
IP Rating	IP44

ELECTRICAL

Wattage	27W
Voltage	120V
Power Factor	0.6
Dimmable	Hard Wire or Touch Button

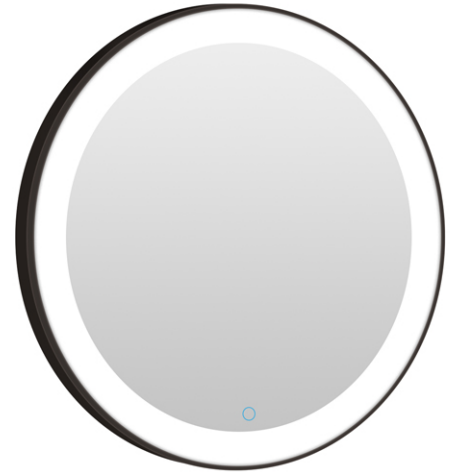

ENERGY CHART

DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1350	27	50

DIMENSIONAL DATA

DIAMETER inches	DEPTH inches
29.5	1.6

ORDERING LOGIC

EX: TONDU-27-BB

FAMILY	CCT	FINISH	CONTROL OPTIONS
TONDU	27 2700K	BB Black Brushed	HWELV Hard Wire ELV Dimmable
	30 3000K	BP Black Powdered	HW010 Hard Wire 0-10V Dimmable
	40 4000K		TB Touch Button Dimmable
	50 5000K		PB Push Button On/Off
	60 6000K		OS Microwave Occupancy Sensor On/Off
	FS3 Field Selectable 2700K / 3000K / 3500K		
	FS5 Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K		
	TW Tunable White 3000K - 6000K, TOUCH BUTTON CONTROL ONLY		