

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



## VT VAPOR TIGHT LED

The VT Vapor Tight family is the perfect solution to applications where fixtures are exposed to extreme temperatures, moisture and debris.

- Food Processing Facilities
- Laboratories & Refrigeration Centers
- Parking Garages & Gas Stations

### PHYSICAL

Material	Low Profile Polycarbonate
Mounting	Surface and Suspended
Lens	Opal or Clear Polycarbonate Diffuser
CCT	3500K, 4000K, 5000K, Field Selectable (3500K, 4000K, 5000K)
CRI	80+

### PERFORMANCE

Warranty	5 years
Certifications	NEMA 4, NSF, UL, CUL, DLC
IP Rating	IP65
Rated Life	L70 50,000 hours
Operating Temperature	-30°C to 40°C (-22°F to +104°F)

### ELECTRICAL

Wattage	25W, 40W, 60W, 80W
Voltage	120-277V
Power Factor	>0.98
Dimmable	0-10V

### ENERGY CHART


SIZE	LENGTH feet	LUMENS	WATTAGE	EFFICACY lm/w
2	2	3250	25	130
4	4	5200	40	130
4	6	7800	60	130
8	8	10400	80	130

### ORDERING LOGIC

EX: VT-2-25-35-SM-OP


FAMILY	SIZE	WATTAGE	CCT	MOUNTING	LENS	OPTIONS
VT	2 2'	25 25W	35 3500K	SM Surface STANDARD	OP Opal PC Diffuser STANDARD	OS Occupancy Sensor
	4 4'	40 40W	40 4000K	SP Suspended	CL Clear PC	DH Daylight Harvesting
		60 60W	50 5000K			EM Emergency Backup: 90-Min.
	8 8'	80 80W	FS Field Selectable 3500K/4000K/5000K			SS-LC Stainless Steel Lens Clips
						CC Custom Configurations FOR ADDITIONAL OPTIONS CONTACT SALES@SAGE.LIGHTING

**DIMENSIONS**

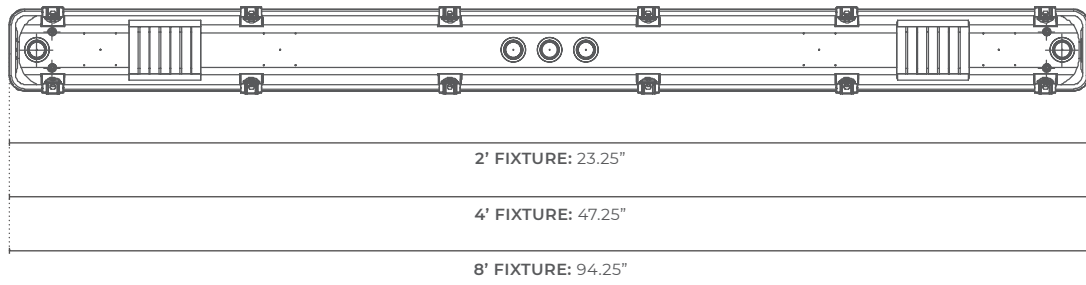


**MOUNTING**


Suspended Mount



Surface Mount

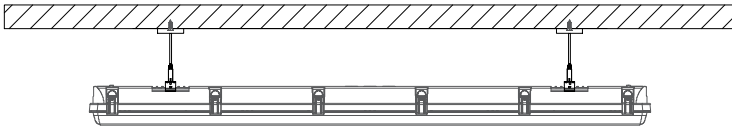


**ELECTRICAL CONNECTION**

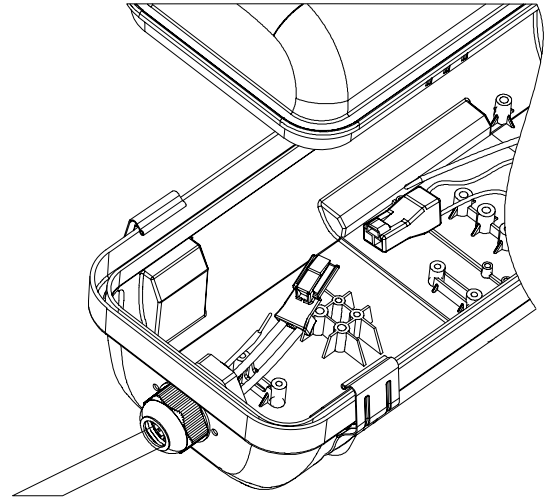


**PHOTOMETRICS**

**25W**

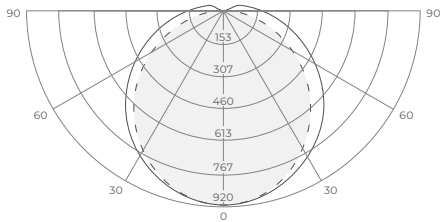


0° H ———  
90° H - - -

**40W**

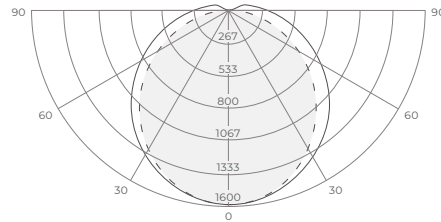

0° H ———  
90° H - - -

**60W**

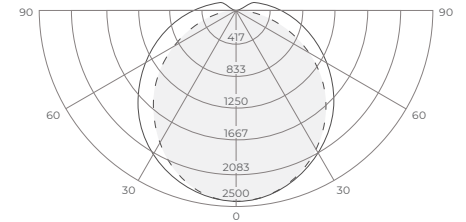

0° H ———  
90° H - - -