

# TERRAIN

## SITE LIGHTING

PROJECT

DATE

COMMENTS



### ENERGY CHART

SIZE	HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
42	9.27	14.24	5460	42	130
60			7800	60	130
80			10400	80	130
100			13000	100	130
120			15600	120	130
FS1			5460/7800/10400	40/60/80	130
FS2			10400/13000/15600	80/100/120	130

## WPFC-G2 WALL PACK FULL CUTOFF LED GEN 2

The WPFC-G2 Series Wall Pack offers an IP65 wet location rated outdoor LED luminaire with optional photocell, motion sensor, and emergency battery.

- Parking Lots
- Underpasses
- Perimeter / Area Lighting

### PHYSICAL

Material	Die-Cast Aluminum
Mounting	Wall Mount
Lens	Polycarbonate
Finish	Bronze, Black

### PERFORMANCE

Warranty	5 years
Certifications	UL, cETLus, DLC Premium, Wet Location
IP Rating	IP65
CCT	3000K, 4000K, Field Selectable: 3000K/4000K/5000K
CRI	80+

### ELECTRICAL

Wattage	42W, 60W, 80W, 100W, 120W Field Selectable: (40W/60W/80W), (80W/100W/120W)
Voltage	100-277V
Dimmable	0-10V

### ORDERING LOGIC

EX: WPFC-G2-42-30-BK

FAMILY	WATTAGE	CCT	FINISH
WPFC-G2	42 42W	30 3000K	BK Black
	60 60W	40 4000K	BZ Bronze
	80 80W		
	100 100W		
	120 120W		
	FS1 Field Selectable 40W / 60W / 80W	FS Field Selectable 3000K / 4000K / 5000K	
	FS2 Field Selectable 80W / 100W / 120W		


### ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

EX: WPFC-G2-PC

FAMILY	ACCESSORIES
WPFC-G2	PC Photocell
	OS Occupancy Sensor
	EM8 8W Emergency Battery
	EM18 18W Emergency Battery




## DIMENSIONS

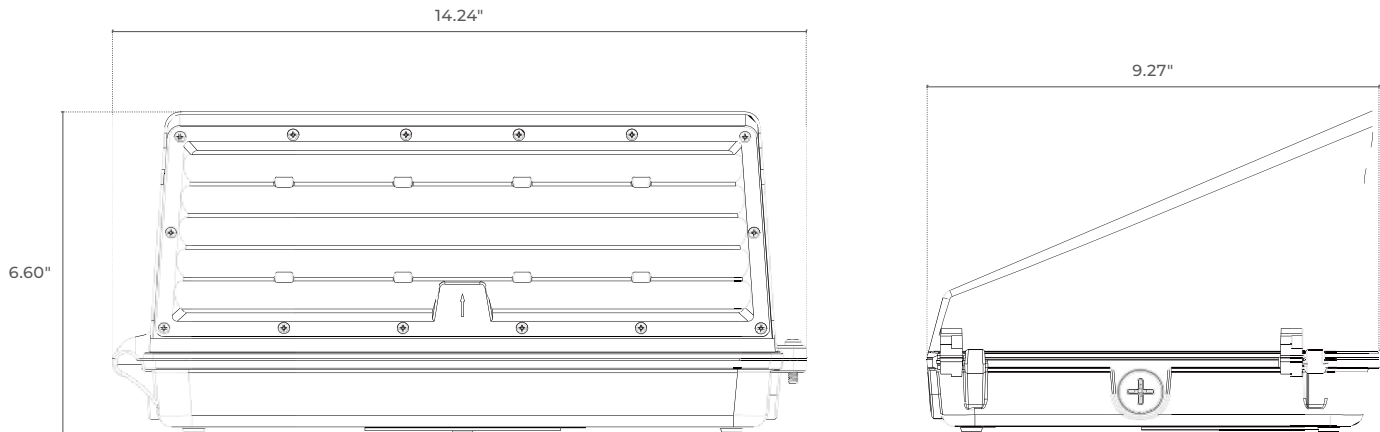

## PHOTOMETRICS

**AVERAGE BEAM ANGLE (50%): 97.2°**

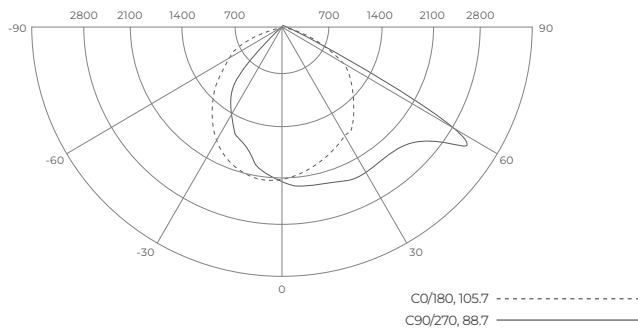

## ADDITIONAL IMAGERY

**EMERGENCY BATTERY**

