

PROJECT

DATE

COMMENTS



DISCONTINUED



ENERGY CHART

| SIZE | HEIGHT inches | LENGTH inches | DEPTH inches | DELIVERED LUMENS | WATTAGE | EFFICACY lm/w |
|------|------------------|------------------|-----------------|---------------------|---------|------------------|
| 1 | 9.1 | 14.2 | 7.5 | 4800 | 40 | 120 |
| | 9.1 | 14.2 | 7.5 | 7200 | 60 | 120 |
| | 9.1 | 14.2 | 7.5 | 9600 | 80 | 120 |
| | 9.1 | 14.2 | 7.5 | 12000 | 100 | 120 |
| | 9.1 | 14.2 | 7.5 | 14400 | 120 | 120 |

ORDERING LOGIC

EX: WPSC-40-27-40-JB

| FAMILY | WATTAGE | VOLTAGE | CCT | OPTIONS |
|--------|-----------------|--------------------|-----------------|---------------------------|
| WPSC | | | | |
| | 40 40W | 27 100-277V | 40 4000K | DS Daylight Sensor |
| | 60 60W | 34 100-347V | 50 5000K | |
| | 80 80W | | 57 5700K | |
| | 100 100W | | | |
| | 120 120W | | | |

WPSC WALL PACK SEMI-CUTOFF LED

The WPSC Series Wall Pack offers an IP65 wet location rated outdoor LED luminaire with a photocell sensor.

- Parking Lots
- Underpasses
- Perimeter / Area Lighting

PHYSICAL

| | |
|----------|---------------------|
| Material | Die-Cast Aluminum |
| Mounting | J-Box, Conduit |
| Lens | Polycarbonate Lens |
| Finish | Bronze |
| CCT | 4000K, 5000K, 5700K |
| CRI | 70+ |

PERFORMANCE

| | |
|-----------------------|------------------------------------|
| Warranty | 5 years |
| Certifications | CETL, ETL, DLC, CE, ROHS Compliant |
| IP Rating | IP65 |
| Rated Life | L70 65,000 hours |
| Operating Temperature | -20°C to 45°C (-4°F to 113°F) |


ELECTRICAL

| | |
|---------|---------------------------|
| Wattage | 40W, 60W, 80W, 100W, 120W |
| Voltage | 120-277V, 347-480V |



DIMENSIONS

SIZE 1

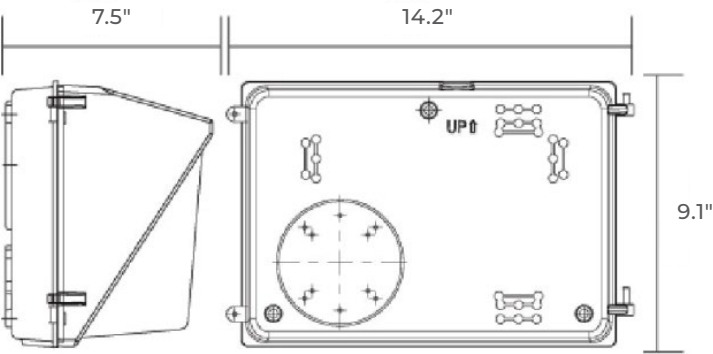

SIZE 2

