

PROJECT DATE

COMMENTS



WPSC WALL PACK SEMI-CUTOFF LED

The WPSC Series Wall Pack offers an IP65 wet location rated outdoor LED luminaire with a photocell sensor.

- Parking Lots
- Underpasses
- Perimeter / Area Lighting

PHYSICAL

Material	Die-Cast Aluminum
Mounting	J-Box, Conduit
Lens	Polycarbonate Lens
Finish	Bronze
CCT	4000K, 5000K, 5700K
CRI	70+

PERFORMANCE

Warranty	5 years
Certifications	CETL, ETL, DLC, CE, ROHS Compliant
IP Rating	IP65
Rated Life	L70 65,000 hours
Operating Temperature	-20°C to 45°C (-4°F to 113°F)

ELECTRICAL

Wattage	40W, 60W, 80W, 100W, 120W
Voltage	120-277V, 347-480V

ENERGY CHART

SIZE	HEIGHT inches	LENGTH inches	DEPTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1	9.1	14.2	7.5	4800	40	120
	9.1	14.2	7.5	7200	60	120
	9.1	14.2	7.5	9600	80	120
	9.1	14.2	7.5	12000	100	120
	9.1	14.2	7.5	14400	120	120


ORDERING LOGIC

EX: WPSC-40-27-40-JB

FAMILY	WATTAGE	VOLTAGE	CCT	OPTIONS
WPSC	40	27	40	DS Daylight Sensor
	40W	100-277V	4000K	
	60	34	50	
	60W	100-347V	5000K	
	80		57	
80W		5700K		
100				
100W				
120				
120W				

DIMENSIONS

SIZE 1

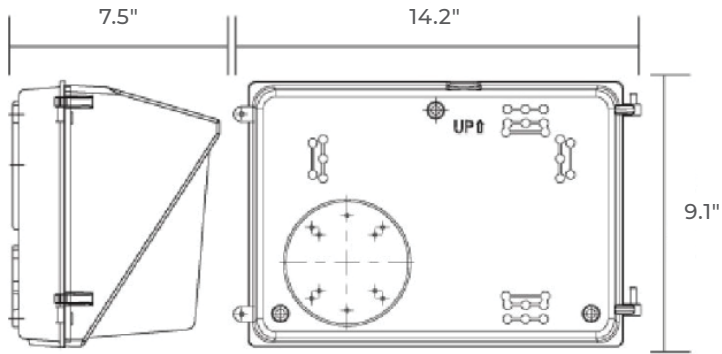

SIZE 2

