

PROJECT  DATE

COMMENTS



**IN STOCK**



## WPSG-QS WALL PACK SHALLOW GLASS LED QUICK SHIP

WPSG-QS is an easy to install low maintenance slim rectangular LED wall pack with a die cast aluminum housing and prismatic glass lens. Ideal for replacing 200-400W metal halide or high pressure sodium fixtures with field selectable wattage and CCT. WPSG-QS is equipped with an integral photocell that can be turned on or off in the field with a dip switch.

- Parking Lots
- Underpasses
- Perimeter / Area Lighting

### PHYSICAL

Material	Die-Cast Aluminum
Mounting	Wall Mount
Lens	Glass
Finish	Bronze Powder Coat
Source	Lumileds LEDs

### PERFORMANCE

Warranty	5 years
Certifications	cULus, DLC Premium, FCC
IP Rating	IP65
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 45°C (-4°F to 113°F)
CCT	Field Selectable: 3000K, 4000K, 5000K
CRI	80+
Beam Angle	120°

### ENERGY CHART

HEIGHT inches	LENGTH inches	DEPTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w	VOLTAGE/CURRENT INPUT	
						120V	277V
4.29	9.25	13.74	10400	80	130	0.66A	0.28A
4.29	9.25	13.74	13000	100	130	0.83A	0.36A
4.29	9.25	13.74	15600	120	130	1.0A	0.43A

### ELECTRICAL

Wattage	80W, 100W, 120W
Voltage	120-277V
Power Factor	0.9
Dimmable	0-10V


### ORDERING LOGIC

EX: WPSG-QS-50


FAMILY	CCT
<b>WPSG-QS</b>	<input type="text"/>
	<b>50</b> 5000K
	<b>FS3</b> Field Selectable 3000K / 4000K / 5000K



**DIMENSIONS**

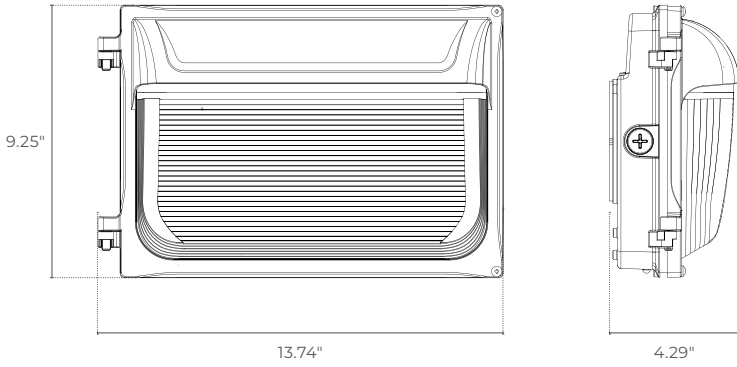


**FUNCTION OPTIONS**




**PHOTOMETRICS - WPSG-QS-80W**

AVERAGE BEAM ANGLE (50%): 119.2°

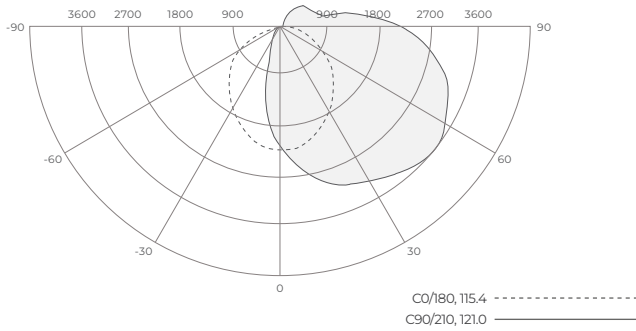

**PHOTOMETRICS - WPSG-QS-100W**

AVERAGE BEAM ANGLE (50%): 120.9°

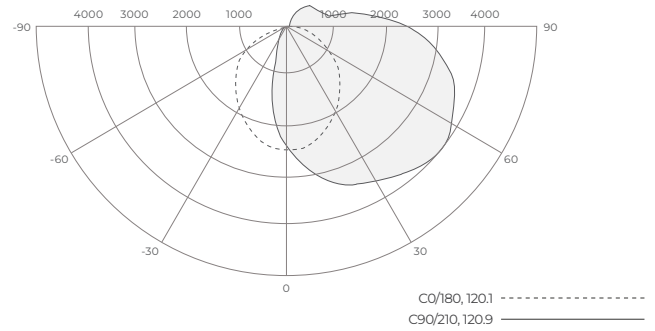

**PHOTOMETRICS - WPSG-QS-120W**

AVERAGE BEAM ANGLE (50%): 119.7°

