

(H)

Intertek

PROJECT

DATE

COMMENTS







ORDERING LOGIC

A REAL PROPERTY OF THE PROPERT

XFMR LOW VOLTAGE TRANSFORMER

The XFMR Series is a durable, stainless steel low-voltage transformer available in 100W, 200W, and 300W models. Designed for 120V input and dual 12VAC/15VAC output, it includes built-in over-current and overtemperature protection for safe and reliable operation. A built-in photocell sensor and selectable timer settings (1–8 hours) offer flexible control for landscape lighting. ETL-listed and IP44-rated, XFMR is ideal for outdoor installations requiring performance, protection, and convenience.

PHYSICAL

Material	Stainless Steel
PERFORMANCE	
Warranty	5 years
Certifications	ETL
IP Rating	IP44
Timer Settings	1 hour, 2 hour, 4 hour, 6 hour, 8 hour
Photocell Sensor	Yes

ELECTRICAL


Wattage	100W, 200W, 300W
Input Voltage	120V 60Hz
Output Voltage	12VAC
Over Current Protection	Yes
Over Temperature Protection	Yes

EX: XFMR-100

SIZE
100W
20014/
200W




DIMENSIONS

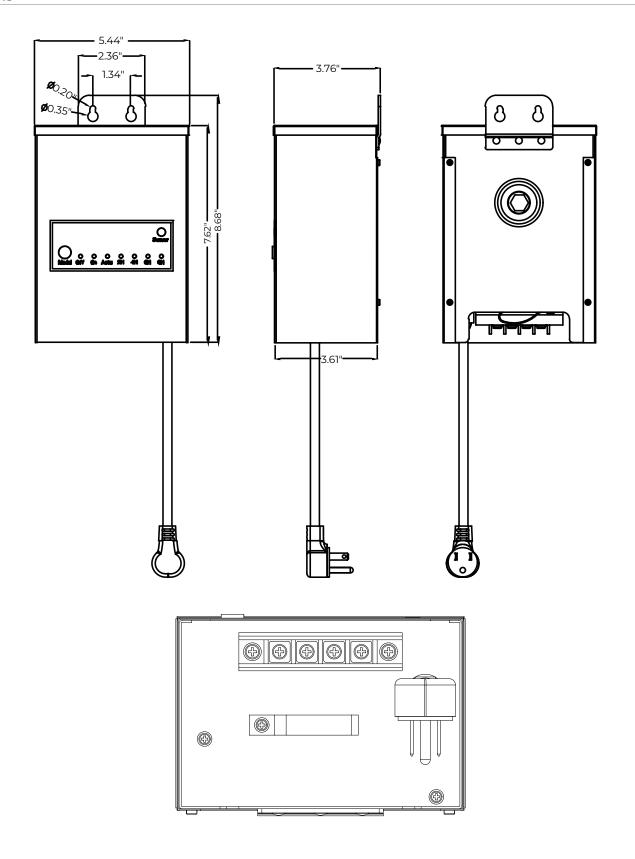



XFMR LOW VOLTAGE TRANSFORMER


ADDITIONAL IMAGERY

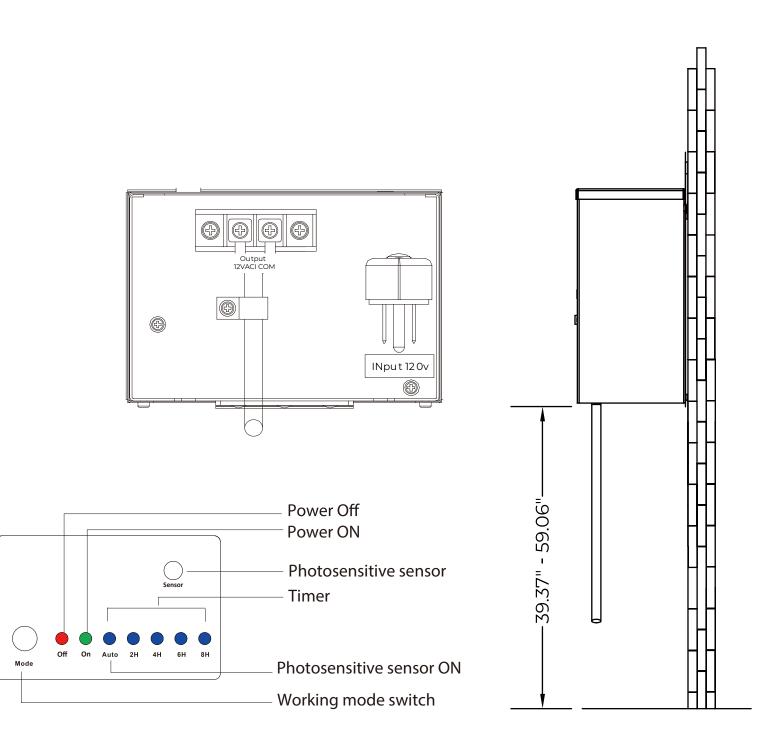




ADDITIONAL IMAGERY

Console Panel Replaceable











SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SAGE BRANDS FOR UP TO DATE TERRAIN SITE LIGHTING - A DIVISION OF SAGE BRANDS • TERRAIN.LIGHTING | SAGE BRANDS • SAGE.LI