

# RWC-DI-G3P ROUND WALL CYLINDER LED DIRECT/INDIRECT GEN 3

PROJECT  DATE

COMMENTS



Transform any outdoor space with the RWC-DI-G3P Series, a captivating, round, high-output LED wall mount fixture that blends direct and indirect light distribution for stunning illumination. Engineered for ultimate flexibility, it features field-selectable CCT (3000K/4000K/5000K) and wattage (12W/18W/24W) to tailor light to any mood or purpose. Equipped with a built-in photocell (dip switch enabled/disabled) and dual dimming (triac at 120V, 0-10V for 120-277V), this fixture adapts seamlessly to diverse settings. Available in sleek black, white, or bronze finishes, the RWC-DI-G3P guarantees striking performance and reliability for every outdoor application.

## PHYSICAL

Material	Die-Cast Aluminum Housing
Mounting	Wall Mount
Lens	Glass
Finish	Powder Coated: Black, Bronze, White

## PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, RoHS Compliant
IP Rating	IP65
Rated Life	50,000 hours
Operating Temperature	0°C to 50°C (32°F to 122°F)
THD	<20% at full load
CCT	Field Selectable: 3000K, 4000K, 5000K
CRI	90
Beam Angle	60°
Photocell	Built In (Enabled/Disabled by Dip Switch)

## ELECTRICAL

Wattage	Field Selectable: 12W, 18W, 24W
Voltage	120-277V, 60Hz
Power Factor	>0.9 at full load
Dimming	Triac dimming at 120V, 0-10V dimming at 120-277V

## ENERGY CHART

HEIGHT inches	DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
11.75	4.375	900	12	75
		1350	18	75
		1800	24	75


## ORDERING LOGIC

EX: RWC-DI-G3P-FS-BK

FAMILY	CCT	FINISH	OPTIONS
<b>RWC-DI-G3P</b>	<b>FS</b> Field Selectable 3000K / 4000K / 5000K	<b>BK</b> Black <b>BZ</b> Bronze <b>WH</b> White	<b>EM</b> 4W Emergency Battery Backup



**DIMENSIONS**

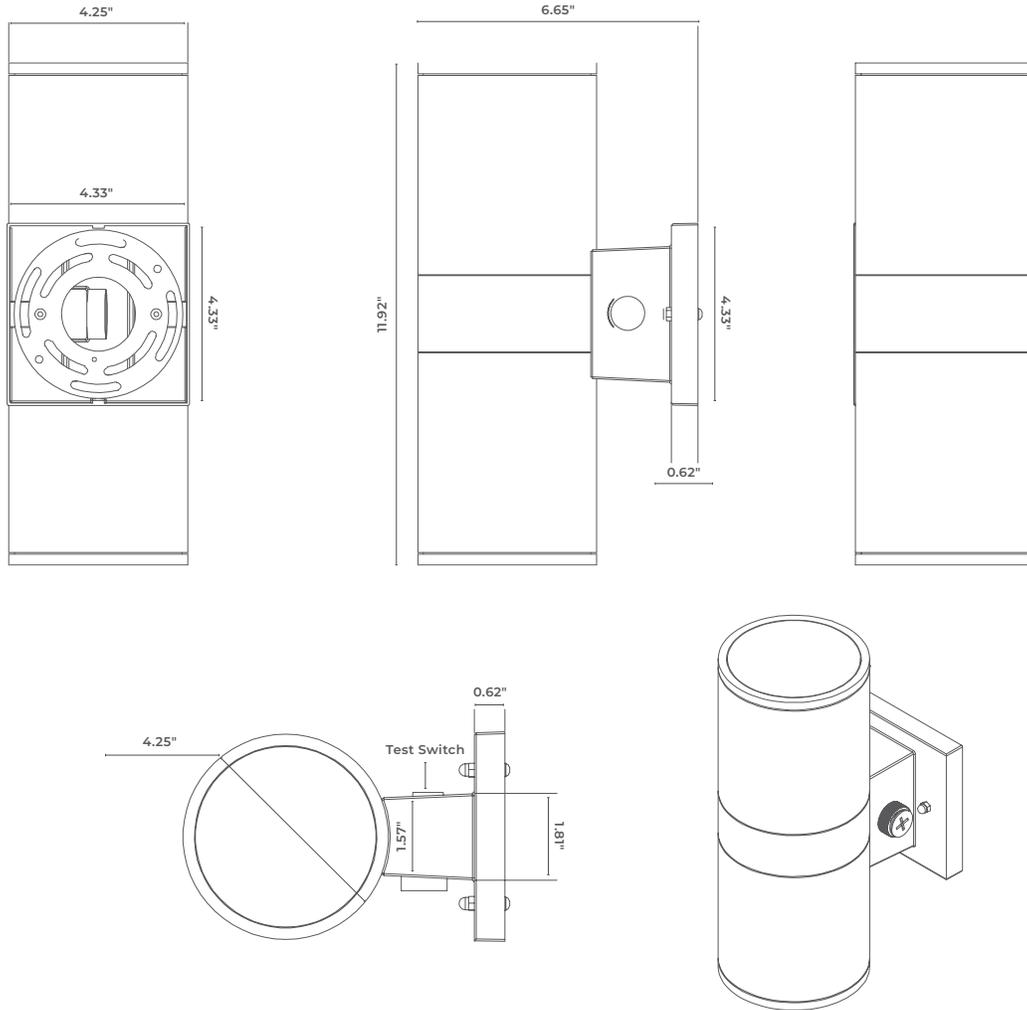

**ADDITIONAL IMAGERY**



RWC-DI-G3P-FS-BK



RWC-DI-G3P-FS-BZ



RWC-DI-G3P-FS-WH

