

PROJECT

DATE

COMMENTS



SPR-WL-TL-SS SLIM PANEL ROUND LED WET LOCATION TRIMLESS SIDE SWITCH

SPR-WL-TL-SS is a trimless ultra thin flush mount luminaire that delivers sleek, even, comfortable illumination. Its field-selectable CCT enables quick color adjustments (2700K to 5000K) with a convenient switch on the side of the housing that can be accessed after installation. SPR-WL-TL-SS fits 2.75 or 3.5-inch junction boxes, making it perfect for commercial, residential, and hospitality settings. It's triac dimmer-compatible, offering smooth dimming from 100% to 10% for optimal brightness control. Built with a high-quality 120V driver, it's wet location listed and comes with a 5-year warranty for dependable, energy-efficient lighting.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Aluminum
Lens Material	Polycarbonate
Mounting	Surface Mounting (2.75 or 3.5-inch Junction Boxes)
Finish	White, Black

PERFORMANCE

Warranty	5 years
Certifications	cETLus, Wet Location
Rated Life	≥50,000hours
Operating Temperature	-4°F to 113°F (-20°C to 45°C)
CCT	Field Selectable: (2700K/3000K/3500K/4000K/5000K)
CRI	90
Beam Angle	120°

ENERGY CHART

SIZE	DIAMETER inches	HEIGHT inches	DELIVERED LUMENS (3000K)	WATTAGE	EFFICACY lm/w
5	5.72	1.59	731	10	73
7	7.5	1.59	1095	15	73
9	8.88	1.59	1440	18	80

ELECTRICAL


Wattage	10W, 15W, 18W
Voltage	120V 60Hz
Power Factor	>0.9
Dimmable	Triac Dimmable 100-10%

ORDERING LOGIC

EX: SPR-WL-TL-SS-5-FS-WH

FAMILY	SIZE	CCT	FINISH
SPR-WL-TL-SS		FS	
	5 5 inch	FS Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	WH White
	7 7 inch		BK Black
	9 9 inch		

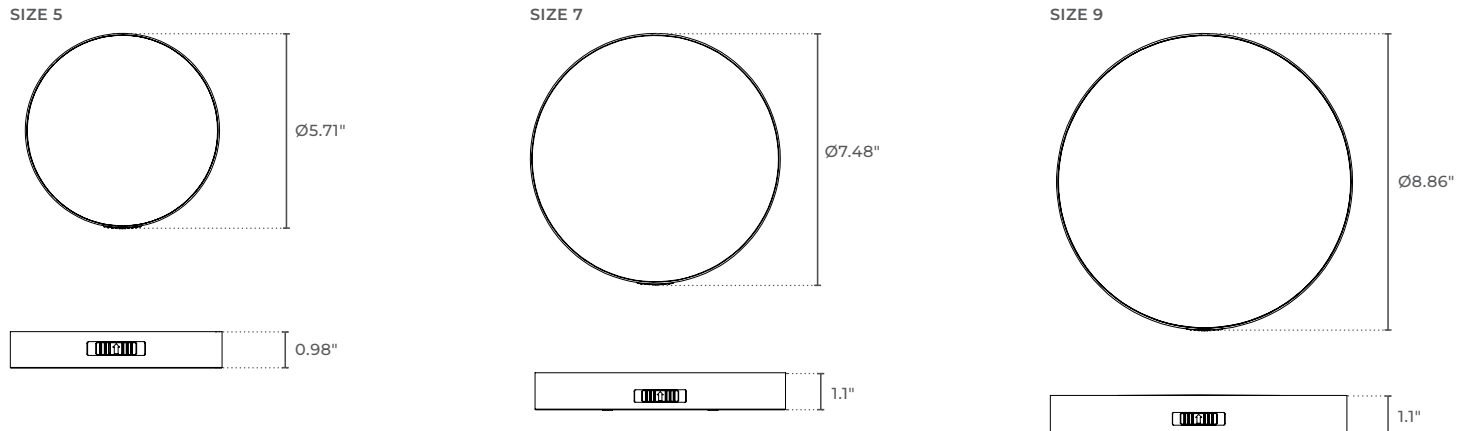

DIMENSIONS

RECOMMENDED DIMMERS
LUTRON MODELS

- TG-600PR-WH
- CTCL-153PDH-WH
- TGCL-153PH-LA
- SLV-600P-AL
- DVCL-153P
- S2-LFSQH-WH
- CT-103PR-WH
- DVWCL-153PH

- RCL-153RNL
- CTCL-150H

LEVITON MODELS

- 6672
- RNL06

MOUNTING BRACKET


FIELD SELECTABLE CCT

ACCESSORIES
Wire Nuts

Screws


ADDITIONAL IMAGERY

SIZE 5

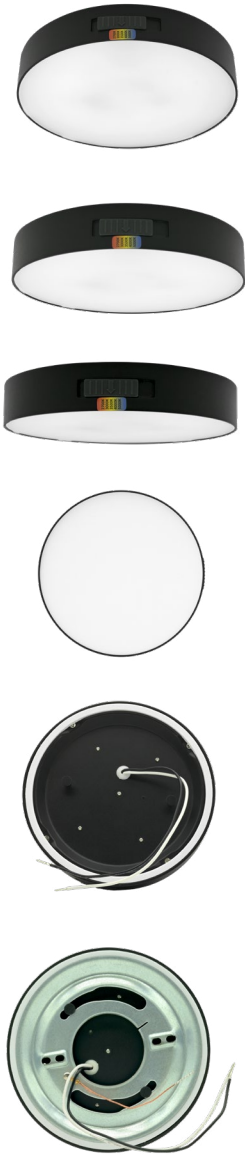

SIZE 7



SIZE 9

