

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



## RWC-G3 ROUND WALL CYLINDER LED DIRECT GEN 3

The RWC-G3 Series is an outdoor decorative, round, high output wall mount fixture with direct LED light distribution.

- Residential
- Commercial
- Hospitality

### PHYSICAL

Material	Die-Cast Aluminum Housing
Mounting	Wall Mount
Lens	Acrylic
Finish	Powder Coated: Black, Bronze, White, Gray

### PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL
IP Rating	IP65
Rated Life	≥50,000 hours
Operating Temperature	0°C to 50°C (32°F to 122°F)
THD	<20% at full load
CCT	Field Selectable: (3000K/4000K/5000K)
CRI	80+
Beam Angle	60°

### ENERGY CHART

HEIGHT inches	DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
8.39	4.3	675	9	75
		900	12	75
		1120	15	75

### ELECTRICAL

Wattage	Field Selectable: (9W/12W/15W)
Voltage	110-277V AC
Power Factor	>0.9 at full load
Dimming	0-10V


### ORDERING LOGIC

EX: RWC-G2-FS-BK


FAMILY	CCT	FINISH	OPTIONS
<b>RWC-G3</b>	<b>FS</b>		
	<b>FS</b> Field Selectable 3000K/4000K/5000K	<b>BK</b> Black <b>BZ</b> Bronze <b>WH</b> White <b>GR</b> Gray	<b>EM</b> 4W Emergency Battery Backup <b>PC</b> Photocell



**DIMENSIONS**

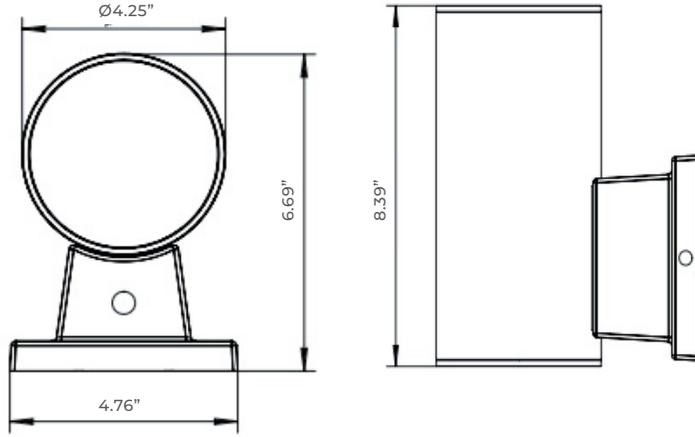

**FIELD SELECTABLE FUNCTIONS**

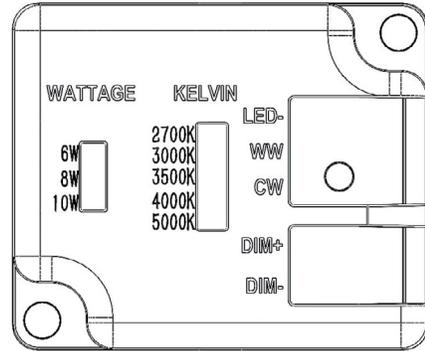

**ADDITIONAL IMAGERY**

