


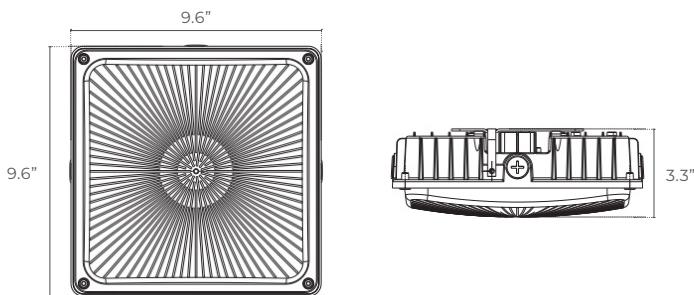

PROJECT	DATE
COMMENTS	

**IN STOCK****ENERGY CHART**

HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
11.1	3.3	4800	40	120
		6000	50	120
		9000	75	120

ORDERING LOGIC**CP CANOPY LED**

The CP series is intended for new construction applications, includes provisions for surface and pendant mounting, and is IP65 rated and wet location listed.

- Parking Garage
- Canopy
- Tunnels

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Surface & Pendant (3/4" NPT Stem Provided by Others)
Lens	Polycarbonate
Finish	Bronze

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, cETLus, DLC Listed
IP Rating	IP65
Rated Life	>100,000hours
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
Dimmable	0-10V
CCT	3000K, 4000K, 5000K, 5700K
CRI	70+
Beam Angle	120°

ELECTRICAL

Wattage	40W, 50W, 75W
Voltage	120-277V
Power Factor	>0.90

**ACCESSORIES ORDERING LOGIC
(ORDER SEPARATELY)**

EX: CP-MB

FAMILY	WATTAGE	CCT	OPTIONS	EX: CP-40-30
CP				
40	40W	30 3000K	D 1-10V Dimming	
50	50W	40 4000K	OS Occupancy Sensor	
75	75W	50 5000K	EM Integral EM Battery	
57	5700K	OSBL(XX)	Bi-Level Occupancy Sensor (XX=10, 30, OR 50%) FACTORY PROGRAMMED TO DESIGNATE UNOCCUPIED OUTPUT % (ie. OSBL30)	

ACCESSORIES**CP****MB** Mounting Bracket
PROVIDED WITH STANDARD FIXTURE