

PROJECT	DATE
COMMENTS	


**IN STOCK**

**ENERGY CHART**

SIZE	LENGTH feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2	2	2300	20	115
3	3	3450	30	115
4	4	4600	40	115
5	5	5750	50	115
6	6	6900	60	115
8	8	9200	80	115

**DIMENSIONS**

TYPE	LENGTH inches	WIDTH inches	HEIGHT inches
2	23.9	2.8	3.4
3	35.8	2.8	3.4
4	47.4	2.8	3.4
5	59.3	2.8	3.4
6	70.8	2.8	3.4
8	94.1	2.8	3.4

**ALL3 ARCHITECTURAL LINEAR LED 3-INCH**

The ALL3 series has architectural appeal in a simplified form allowing for versatility with suspended, surface, recessed or wall mounting. ALL3 can be utilized for new construction or retrofit applications and is suitable for damp locations.

- Commercial
- Hospitality
- Hallways & Stairwells
- Industrial

**PHYSICAL**

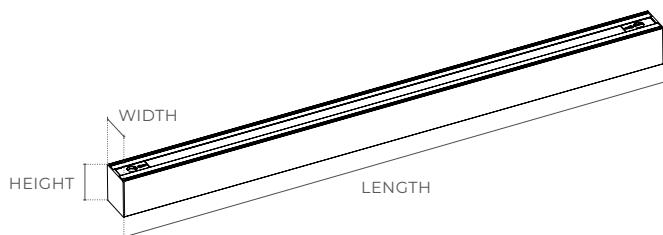
Material	Extruded Aluminum
Mounting	Recessed (Ceiling or Wall), Surface, Suspended, Wall
Lens	Poly碳酸ate
Finish	Matte Black, Matte Gray, Wood, Matte White

**PERFORMANCE**

Warranty	5 years
Certifications	Damp Location, UL, cULus, DLC
IP Rating	IP20
Rated Life	L70 50,000+ hours
Operating Temperature	-30°C to 40°C (-22°F to 104°F)
CCT	Field Selectable: 3000K, 3500K, 4000K
CRI	80+
Chromaticity	5 Step MacAdams

**ELECTRICAL**

Wattage	20W, 30W, 40W, 50W, 60W, 80W
Voltage	120-277V
Power Factor	>0.9
Dimmable	0-10V Dimming



**SURFACE & SUSPENDED MOUNT ORDERING LOGIC**

EX: ALL3-SM-2-DWC-BK

FAMILY	TYPE	SIZE	CEILING	FINISH	OPTIONS
<b>ALL3</b>					
	<b>SM</b> Surface Mount	<b>2</b> 2'	<b>DWC</b> Drywall/Concrete	<b>BK</b> Matte Black	<b>EM</b> Integral Emergency Battery
	<b>SD</b> Suspended Direct	<b>4</b> 4'	<b>TB</b> T-Bar	<b>GR</b> Matte Gray	<b>OS</b> Occupancy Sensor
	<b>SDI</b> Suspended Direct/Indirect	<b>8</b> 8'		<b>WD</b> Wood	
				<b>WH</b> Matte White	

**RECESSED MOUNT ORDERING LOGIC**

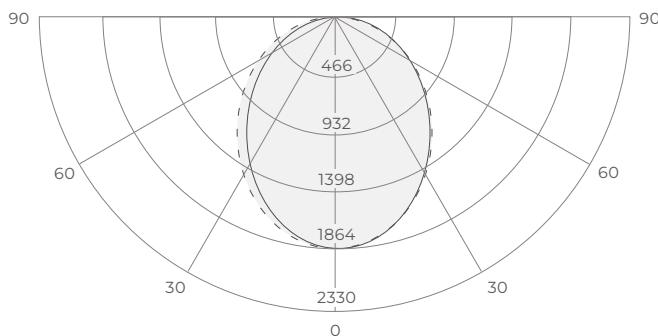
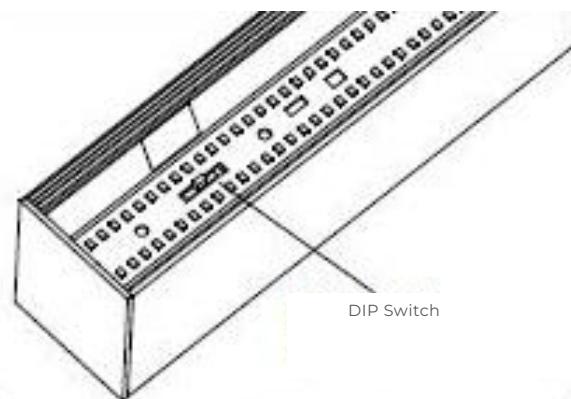
EX: ALL3-RF-2-30-BK





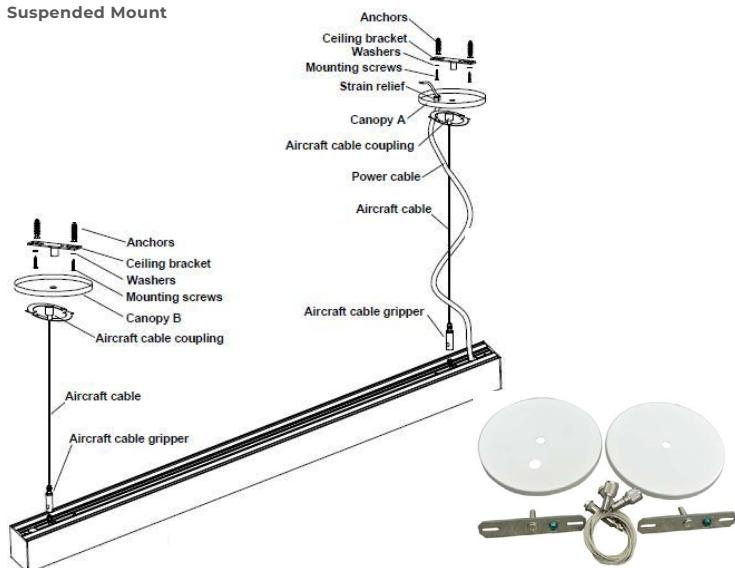
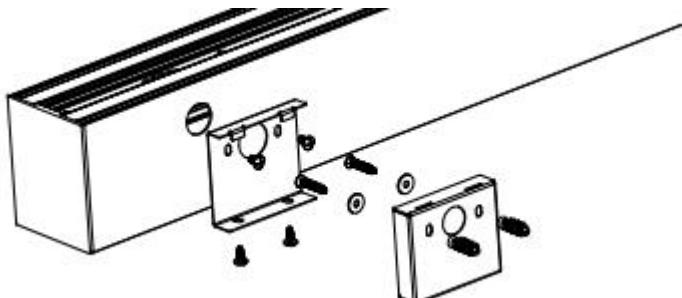
FAMILY	TYPE	SIZE	FINISH	OPTIONS
<b>ALL3</b>	<b>RF</b>			
	<b>RF</b> Recessed Flanged	<b>2</b> 2'	<b>BK</b> Matte Black	<b>EM</b> Integral Emergency Battery
		<b>4</b> 4'	<b>GR</b> Matte Gray	<b>OS</b> Occupancy Sensor
		<b>8</b> 8'	<b>WD</b> Wood	
			<b>WH</b> Matte White	

**WALL MOUNT ORDERING LOGIC**

EX: ALL3-WMD-2-BK

FAMILY	TYPE	SIZE	FINISH	OPTIONS
<b>ALL3</b>				
	<b>WMD</b> Wall Mount Direct	<b>2</b> 2'	<b>BK</b> Matte Black	<b>EM</b> Integral Emergency Battery
	<b>WMDI</b> Wall Mount Direct/Indirect	<b>4</b> 4'	<b>GR</b> Matte Gray	<b>OS</b> Occupancy Sensor
		<b>8</b> 8'	<b>WD</b> Wood	
			<b>WH</b> Matte White	

**PHOTOMETRICS**

**DIP SWITCH**


**MOUNTING**
**Recessed Mount**

**Surface Mount**

**Suspended Mount**

**Wall Mount**

**ACCESSORIES**
**Integral Emergency Battery**

**Occupancy Sensor**

**SPECIFICATIONS**

Universal Input Voltage	100-277VAC - 50-60Hz
AC Input Current	100mA Maximum
Output Power	10W
Emergency Time	≥1.5H
AC Input Power Rating	7.0W Maximum
Output Current & Voltage	200-400mA 25-48Vdc
Battery	Li-Ion - 11.1V/2000mAH



**ADDITIONAL IMAGERY**

Black Finish



Wood Finish

