

PROJECT

DATE

COMMENTS



DISCONTINUED - SOME REMAINING STOCK



ENERGY CHART

SIZE	DIAMETER Inches	LUMENS	FIELD SELECTABLE WATTAGE	EFFICACY lm/w	FIELD SELECTABLE CCT
4	4.0	600	8	75	2700K 3000K 3500K 4000K 5000K
		750	10	75	
		900	12	75	
6	6.0	900	12	75	
		1125	15	75	
		1350	18	75	

RDR ROUND DOWNLIGHT RETROFIT LED

The RDR series is ideal for retrofit applications where an existing housing is already installed. This high output recessed mount LED luminaire meets Energy Star efficiency standards and it's available with field selectable CCT.

- Residential
- Commercial
- Hospitality

PHYSICAL

Trim Material	Aluminum
Mounting	Recessed
Finish	White
CCT	Field Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, CETL, Energy Star, Title 24
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 50°C (-4°F to 122°F)

ELECTRICAL

Wattage	Field Selectable: 8W, 10W, 12W / Field Selectable: 12W, 15W, 18W
Voltage	120V
Power Factor	>0.9
Dimmable	100% - 10% Triac Dimming

ORDERING LOGIC


EX: RDR-4-FS1

FAMILY	SIZE	WATTAGE
RDR	4 Fits 4"	FS1 Field Selectable 8W / 10W / 12W




DIMENSIONS

SIZE 4

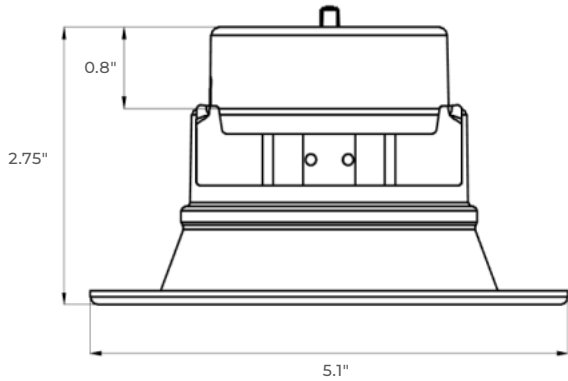

SIZE 6

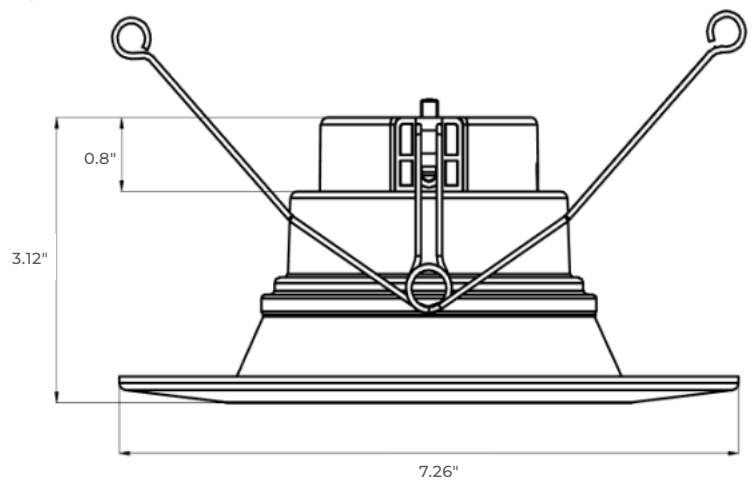

ACCESSORIES

E26 Base Accessory



ADDITIONAL IMAGERY

SIZE 4



SIZE 6

