



PROJECT

COMMENTS

RoHS
Compliant

DATE



RWC-G3P ROUND WALL CYLINDER LED DIRECT GEN 3

Illuminate any outdoor space with confidence using the RWC-G3P Series, a sleek, round, high-output LED wall mount fixture that delivers vibrant, direct light distribution. Designed for ultimate versatility, it boasts field-selectable CCT (3000K/4000K/5000K) and wattage (9W/12W/15W) to perfectly match any ambience or task. With a built-in photocell (easily enabled/disabled via dip switch) and dual dimming (triac at 120V, 0-10V for 120-277V), this fixture adapts effortlessly to any environment. Available in stylish black, white, or bronze finishes, the RWC-G3P ensures stunning performance and durability for every outdoor application.

PHYSICAL

Material	Die-Cast Aluminum Housing
Mounting	Wall Mount
Lens	Glass
Finish	Powder Coated: Black, Bronze, White

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, RoHS Compliant
IP Rating	IP65
Rated Life	≥50,000 hours
Operating Temperature	0°C to 50°C (32°F to 122°F)
THD	<20% at full load
CCT	Field Selectable: 3000K, 4000K, 5000K
CRI	90
Beam Angle	60°
Photocell	Built In (Enabled/Disabled by Dip Switch)

ELECTRICAL

Wattage	Field Selectable: 9W, 12W, 15W
Voltage	120-277V, 60Hz
Power Factor	>0.9 at full load
Dimming	Triac dimming at 120V, 0-10V dimming at 120-277V

ENERGY CHART


HEIGHT inches	DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
7.875	4.375	675	9	75
		900	12	75
		1120	15	75

ORDERING LOGIC

EX: RWC-G3P-FS-BK

FAMILY	CCT	FINISH	OPTIONS
RWC-G3P			
FS	Field Selectable 3000K/4000K/5000K	BK Black	EM 4W Emergency Battery Backup
		BZ Bronze	
		WH White	

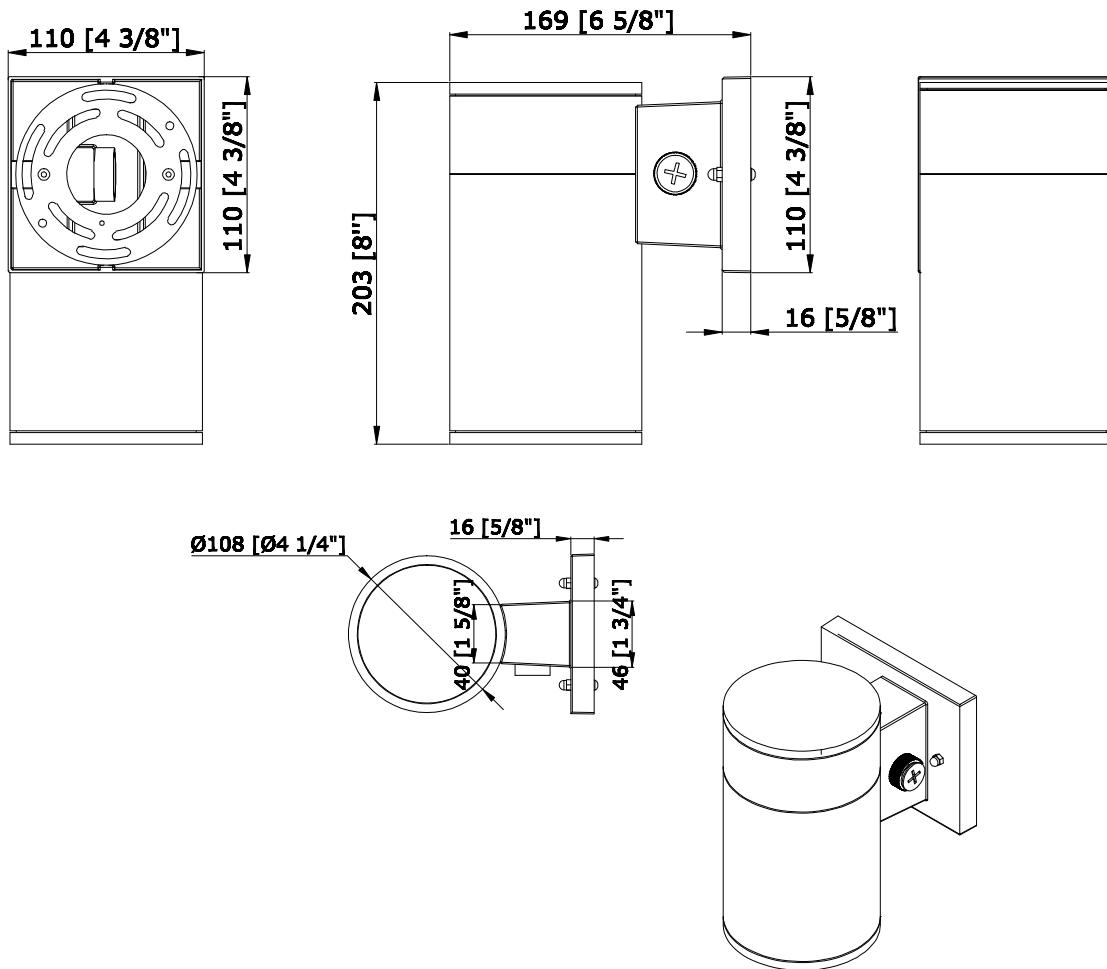

DIMENSIONS

ADDITIONAL IMAGERY
