

PROJECT

DATE

COMMENTS



IN STOCK



ENERGY CHART

SIZE	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
14	2500	20	125
	3750	30	125
	5000	40	125
22	2500	20	125
	3750	30	125
	4500	36	125
24	3750	30	125
	5000	40	125
	5625	45	125

ORDERING LOGIC

EX: BPA-14

FAMILY	SIZE	OPTIONS
BPA		
	14	1 x 4
	22	2 x 2
	24	2 x 4

EM Emergency Backup: 90-Min.

BPA BACKLIT PANEL ADJUSTABLE LED

The BPA flat panel offers a high efficiency LED light output with field selectable wattage and color temperature. Backlit LED technology with PMMA lensing provides high uniformity and reduced glare while achieving DLC Premium with a rigid back enclosure that prevents warping.

- 2' X 4'
- 2' X 2'
- 1' X 4'

PHYSICAL

Mounting	Recessed, Surface, Suspended
Lens	PMMA Lens, PS Diffuser
CCT	Field Selectable: 3500K, 4000K, 5000K
CRI	80+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, IC Rated, UL, DLC Premium, FCC, ROHS Compliant
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 35°C (-4°F to 95°F)
UGR	<22

ELECTRICAL

Wattage	Field Selectable: 20W, 30W, 36W, 40W, 45W
Voltage	120-277V
Dimmable	0-10V


ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

EX: BPA-CK142


FAMILY	ACCESSORIES
BPA	
	CK142 1x4 Suspension Cable Kit: 2 Cables
	CK144 1x4 Suspension Cable Kit: 4 Cables
	CK222 2x2 Suspension Cable Kit: 2 Cables
	CK224 2x2 Suspension Cable Kit: 4 Cables
	CK242 2x4 Suspension Cable Kit: 2 Cables
	CK244 2x4 Suspension Cable Kit: 4 Cables
	SMK14 1x4 White Surface Mount Kit
	SMK22 2x2 White Surface Mount Kit
	SMK24 2x4 White Surface Mount Kit

DIMENSIONS


1 X 4

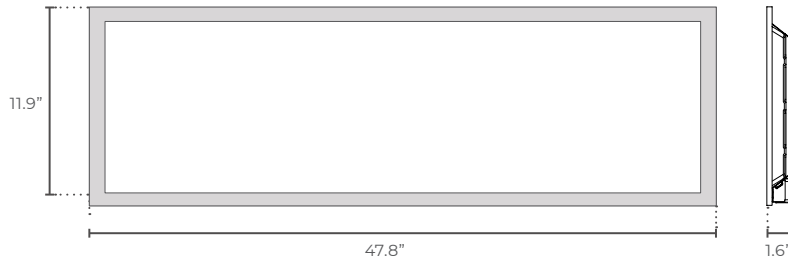

2 X 2

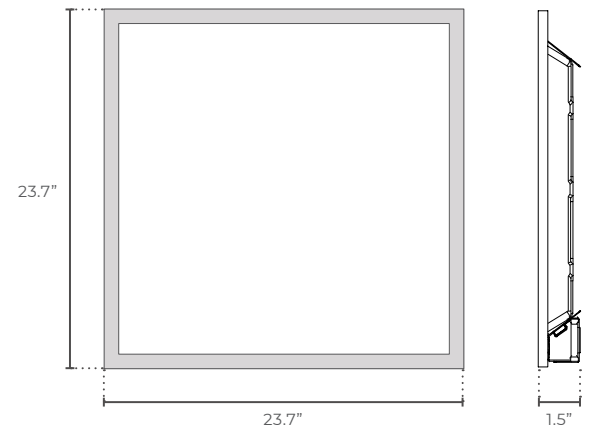


2 X 4

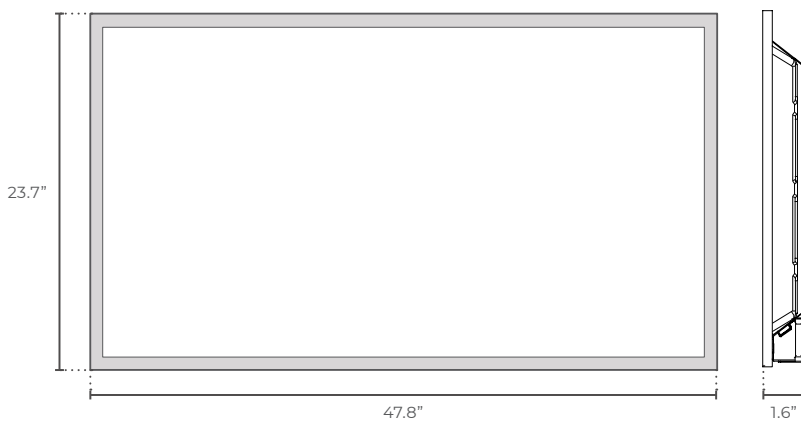


MOUNTING

Suspended Mount


2 Cables: CK142




2 Cables: CK222




2 Cables: CK242




4 Cables: CK144




4 Cables: CK224



4 Cables: CK244



Surface Mount

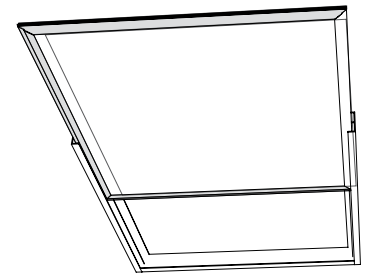

SMK14 1x4 White Surface Mount Kit

SMK22 2x2 White Surface Mount Kit

SMK24 2x4 White Surface Mount Kit