

PROJECT DATE

COMMENTS



IN STOCK



ENERGY CHART

SIZE feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2x2	2,250	15	150
	3,000	20	150
	3,750	25	150
	4,500	30	150
	6,000	40	150
2x4	3,750	25	150
	4,500	30	150
	5,250	35	150
	6,000	40	150
	7,500	50	150

TCB-QS TROFFER CENTER BASKET LED QUICK SHIP

The TCB-QS Series is a CCT and wattage selectable volumetric troffer, available in 2x2 and 2x4 configurations. TCB-QS is ideal for new construction and retrofit applications. TCB-QS utilizes linear prisms on the inside of the diffuser to improve visual uniformity across the entire lens area. TCB-QS is suitable for damp locations.

- Hospitality
- Commercial
- Indoor

PHYSICAL

Material	Steel Body, Aluminum Heatsink
Lens	Prismatic Acrylic Diffuser
Mounting	Recessed
Finish	White

PERFORMANCE

Warranty	5 years
Certifications	cULus, DLC Premium, Damp Location
IP Rating	IP41
Rated Life	L80 50,000 hours
Operating Temperature	-40°C to 45°C (-40°F to 113°F)
CCT	Field Selectable: 3500K/4000K/5000K/5700K/6500K 5000K STANDARD FACTORY SETTING
CRI	>80
Beam Angle	110°

ELECTRICAL

Wattage	Field Selectable: 15W/20W/25W/30W/40W 40W STANDARD FACTORY SETTING Field Selectable: 25W/30W/35W/40W/50W 50W STANDARD FACTORY SETTING
Voltage	100-277VAC 50/60Hz
Dimmable	0-10V
Power Factor	≥0.9
THD	≤20%


ORDERING LOGIC

EX: TCB-QS-22


FAMILY	SIZE
TCB-QS	<input type="text"/>
	22 2x2
	24 2x4

DIMENSIONS


2X4

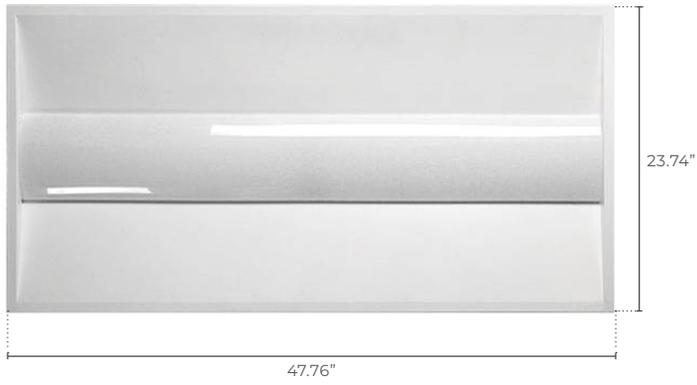

2X2

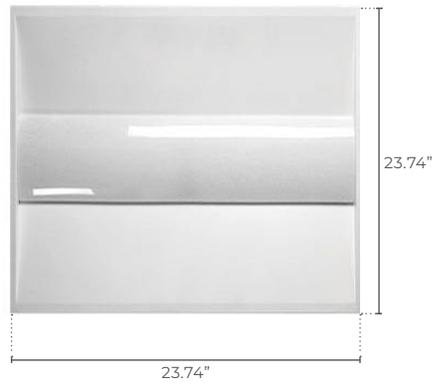


Side View

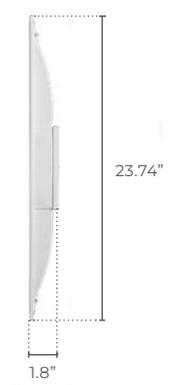

ADDITIONAL IMAGERY

2X4

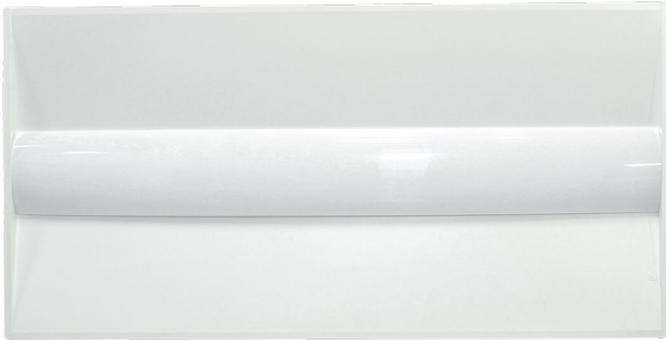

2X2

