

PROJECT DATE

COMMENTS



IN STOCK



ENERGY CHART

LENGTH feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2	1950	15	130
	2600	20	130
	3250	25	130
4	2600	20	130
	3900	30	130
	5200	40	130
4	5200	40	130
	6500	50	130
	7800	60	130
8	7800	60	130
	9100	70	130
	10400	80	130

VT VAPOR TIGHT LED

The VT Vapor Tight family is the perfect solution to applications where fixtures are exposed to extreme temperatures, moisture and debris.

- Food Processing Facilities
- Laboratories & Refrigeration Centers
- Parking Garages & Gas Stations

PHYSICAL

Material	Low Profile Polycarbonate
Mounting	Surface and Suspended
Lens	Opal or Clear Polycarbonate Diffuser

PERFORMANCE

Warranty	5 years
Certifications	NEMA 4, NSF, UL, cULus, DLC
IP Rating	IP65
Rated Life	L70 50,000 hours
Operating Temperature	-30°C to 40°C (-22°F to +104°F)
CCT	Single CCT, Field Selectable: 3500K, 4000K, 5000K 4000K STANDARD FACTORY SETTING
CRI	80+

ELECTRICAL

Wattage	Field Selectable: 15W/20W/25W, 20W/30W/40W, 40W/50W/60W, 60W/70W/80W
Voltage	120-277V
Power Factor	>0.98
Dimmable	0-10V

ORDERING LOGIC

EX: VT-2-25-35-OP


FAMILY	LENGTH	WATTAGE	CCT	LENS	OPTIONS
VT	2' 2'	25 15W/20W/25W	35 3500K	OP Opal PC Diffuser STANDARD	OS Occupancy Sensor
	4' 4'	40 20W/30W/40W	40 4000K		
		60 40W/50W/60W	50 5000K	EM Emergency Backup: 90-Min.	
	8' 8'	80 60W/70W/80W	FS Field Selectable 3500K/4000K/5000K		SS-LC Stainless Steel Lens Clips

**ACCESSORIES ORDERING LOGIC
(ORDER SEPARATELY)**

EX: VT-HC36


FAMILY	OPTIONS
VT	HC36 Hangar Chain 36"

DIMENSIONS

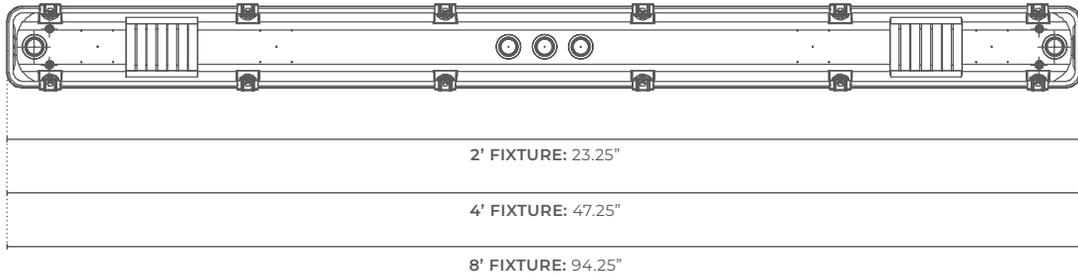


MOUNTING


Surface Mount



Suspended Mount

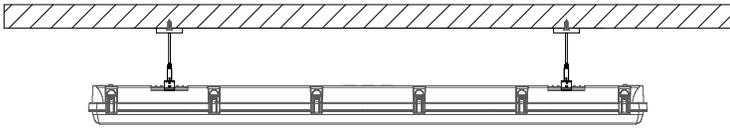


ELECTRICAL CONNECTION

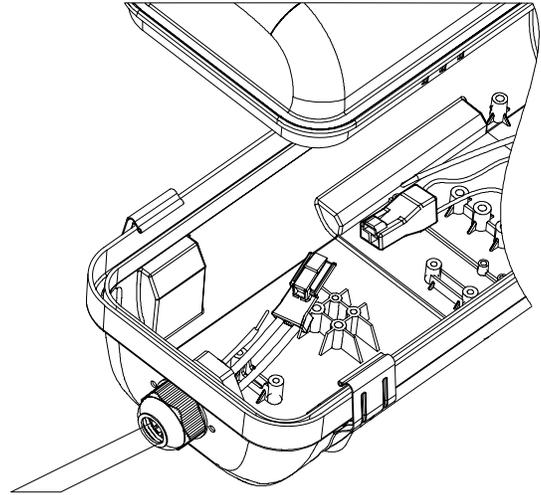


PHOTOMETRICS

25W

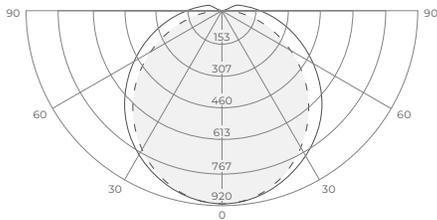


0° H ———
90° H - - -

40W

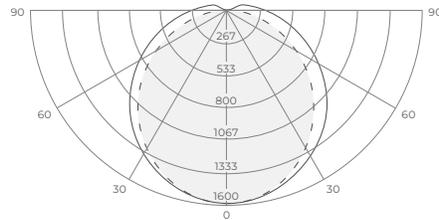

0° H ———
90° H - - -

60W

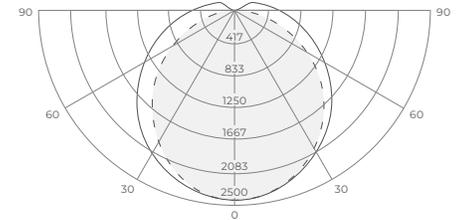

0° H ———
90° H - - -