

SW-2X

STATIC WHITE LED TAPELIGHT DUAL ROW

The SW-2X is a flexible, double row LED ribbon line that offers a high light output with a variety of color temperatures.

- Static-White Family
- 90+ CRI
- Indoor
- 3-Step MacAdams


PROJECT

DATE

COMMENTS



IP20



PHYSICAL

Mounting	3M Adhesive
Cut Length	Varies, See Back
Maximum Run	16' 4"
Minimum Channel Width	SW-2X-9: 0.787" (20mm), SW-2X-12: 0.591" (15mm)

PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, RoHS Approved
IP Rating	IP20
Dimming	Universal (See Recommended Drivers)
CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K
CRI	90+
Chromacity	1-Step MacAdams

ELECTRICAL

Voltage	24V DC Constant Voltage Output
---------	--------------------------------

APPLICATIONS

Cove & Perimeter Lighting
Architectural Back Lighting
Walls & Surfaces
Stairs & Walkways
Decorative Signage
Channel Letters

ENERGY CHART

TYPE	CCT		POWER w/ft	LUMENS/FT	EFFICACY lm/w
SW-2X-9	2700K	5000K	8.8	872	100
	3000K				
	3500K	6000K			
	4000K				
SW-2X-12	1800K	3500K	11.7	1018	87
	2200K	4000K			
	2700K	5000K			
	3000K	6000K			

ORDERING LOGIC


EX: SW-2X-9-27-ST

FAMILY	TYPE	POWER		CCT				LENGTH	
SW	2X							ST	
	2X Dual Row	9	8.8W/Ft	SW-2X-9		SW-2X-12		ST	16'; Cut in Field
		12	11.7W/Ft	27	2700K	18	1800K	35	3500K
				30	3000K	22	2200K	40	4000K
				35	3500K	27	2700K	50	5000K
				40	4000K	30	3000K	60	6000K
				50	5000K				




DIMENSIONS

Minimum Channel Width: 20mm (0.787") for SW-2X-9, 15mm (0.591") for SW-2X-12

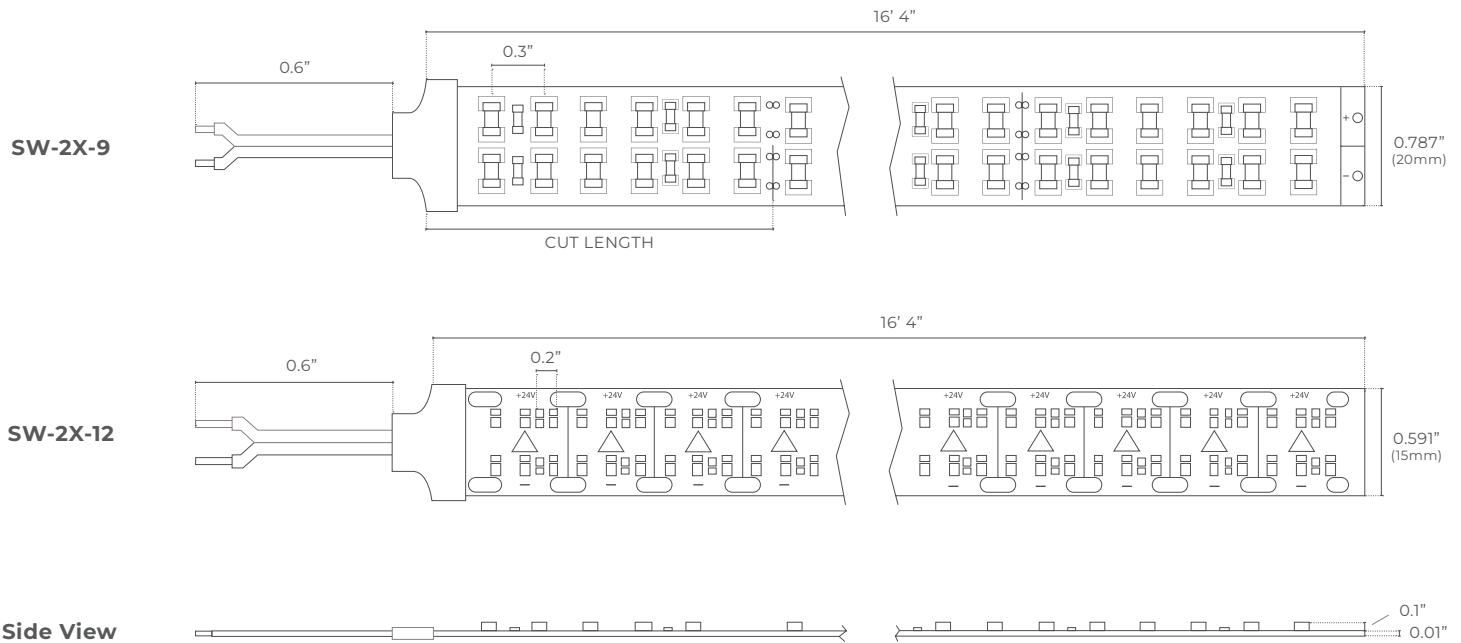

CONNECTION DRAWINGS OF SINGLE COLOR

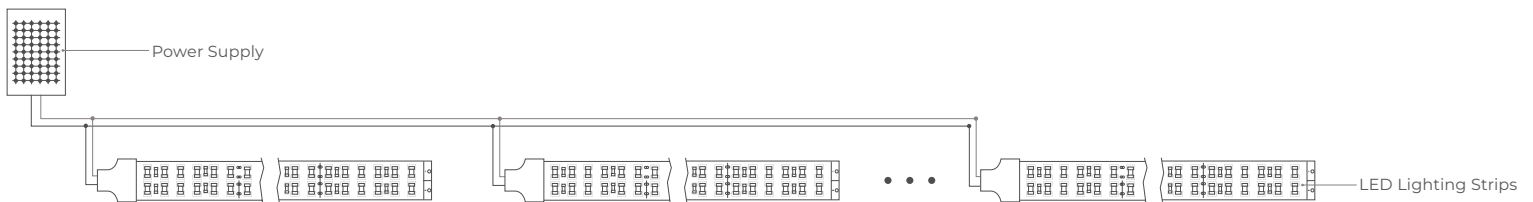

RECOMMENDED DRIVERS

D-60W
60W Constant Voltage LED
Driver 5 In 1 Dimming Function



D-60W-ND
60W Constant Voltage LED
Driver Non-Dimming



D-96W
96W Constant Voltage LED
Driver 5 In 1 Dimming Function



D-300W
300W Constant Voltage LED
Driver 5 In 1 Dimming Function

