

PROJECT

DATE

COMMENTS



PHYSICAL

Material	Metal Back Plate
Mounting	Surface
Lens	Polystyrene
Finish	Black or Brushed Nickel
Source	LED
CCT	Single CCT, Field Selectable 3CCT or Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	80+ or 90+

PERFORMANCE


Warranty	5 years
Certification	Damp Location, ETL, Energy Star
Rated Life	L70 50,000 hours

ELECTRICAL

Wattage	15W, 20W, 25W
Voltage	120V
Power Factor	>0.90
Dimmable	Yes

ORDERING LOGIC

FAMILY	DIAMETER		CCT		CRI		FINISH			
BARS										
	12	12"	27	2700K	50	5000K	80	80+ STANDARD	BK	Black
	14	14"	30	3000K	FS3	Field Selectable 3000K / 4000K / 5000K	90	90+	BN	Brushed Nickel
	16	16"	35	3500K	FS5	Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K				
			40	4000K						

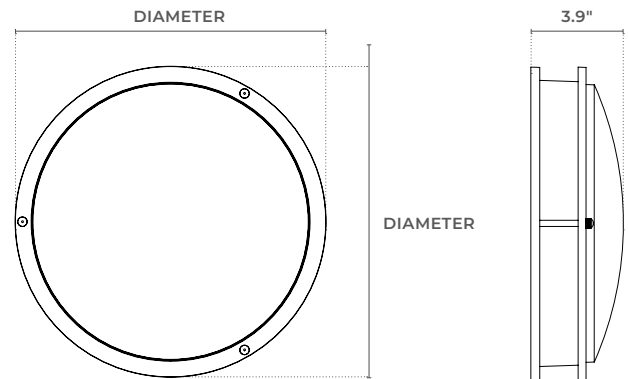

ENERGY CHART

DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
12	1100	15	73.3
14	1500	20	75
16	1900	25	76

RECOMMENDED DIMMERS

LEVITON MODELS

- 6674

• IPL06

• TBL03

LUTRON MODELS

- CT-600P

• CTCL-153P

• 6333-P

• DVCL-153P

• DLC-03P

• AYCL-153P

• S-600P

• LGCL-153P

• MACL-153MR-WH

• TG-600RP

• SCL-153P

EX: BARS-12-27-80-BK

