

PROJECT	DATE
COMMENTS	



IN STOCK



ENERGY CHART

SPEED SETTING	1	2	3	4	5	6
RPM	86	110	126	144	163	197
Amps	0.06	0.08	0.10	0.13	0.17	0.28
Wattage	6.10	8.60	11.40	15.80	21.50	37.30
CFM	6000	6000	6200	6300	6500	7000
CFM/Watts	984	698	544	399	302	188

ORDERING LOGIC

EX: CIRRUS-SN

FAMILY	FINISH
CIRRUS	
SN	Satin Nickel STANDARD
BK	Black
WH	White

CIRRUS CEILING FAN

Cirrus is an interior 120-inch modern 6-blade ceiling fan with a 6-speed DC motor and multiple finish options. Cirrus comes standard with a remote control.

- Garage
- Commercial
- Factory

PHYSICAL

Material	Metal
Blade Material	6 Aluminum Blades
Mounting	Suspended
Fan Diameter	120"
Finish	Black, Satin Nickel, White
Sloped Ceiling Accommodation	30°

PERFORMANCE

Warranty	10 years for motor & 2 years for blades and housing
Certifications	Dry Location, ETL
Features	Low Noise
Reversible	Yes

ELECTRICAL

Wattage	55W
Voltage	120V
Motor	DC Motor
Controls	6-Speed Remote Control



ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)


EX: 6WC-DIM-G-120

CONTROL ACCESSORIES

6WC-DIM-G-120 6-Speed Fan and Light Kit Dimmer Wall Control
[CLICK HERE FOR ACCESSORY SPECIFICATION SHEET](#)

ORDERING NOTES


* Max distance from 6WC-DIM wall control to the fan receiver is 30ft due to internal transmitter inside wall control.

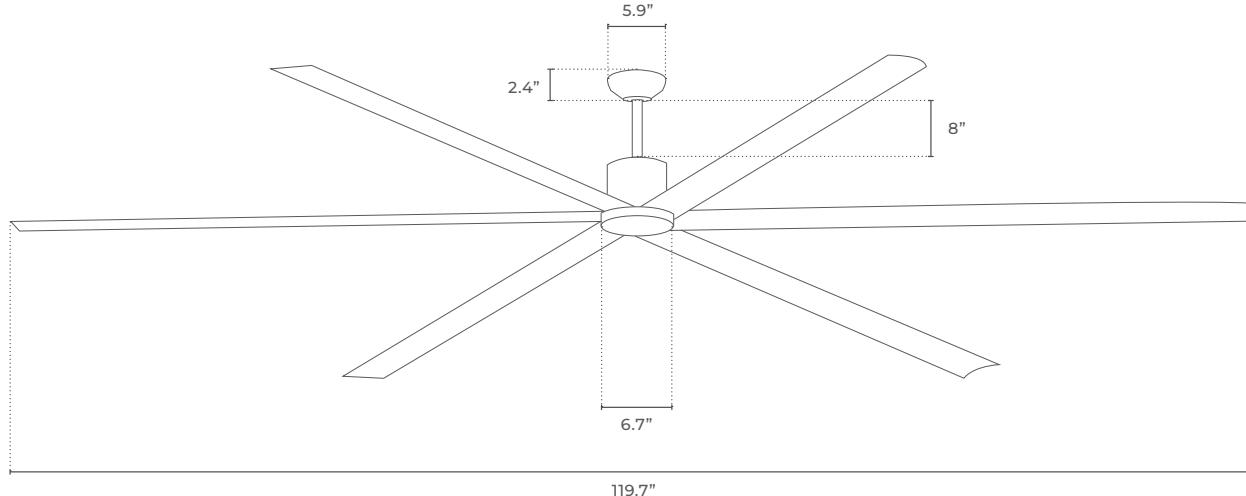DIMENSIONS**STANDARD REMOTE CONTROL**

6RC-WH




DIMENSIONS

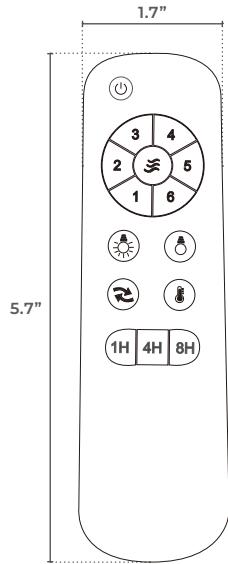

FUNCTIONS

1. Fan ON/OFF Function
2. Fan Speed Settings (1: Lowest / 6: Highest)
3. Natural Wind: Automatic Fan Speeds
4. Light ON Function
5. Light OFF Function
6. Reverse Fan Direction (Reverse Switch)
7. Thermostat:
 - When temperature is greater than 82.4°F(28°C), the fan starts at Speed 6
 - When temperature is greater than 73.4°F(23°C), the fan starts at Speed 3
 - When temperature is lower than 73.4°F(23°C), the fan stops
8. Timer (1 hr / 4 hr / 8 hr)

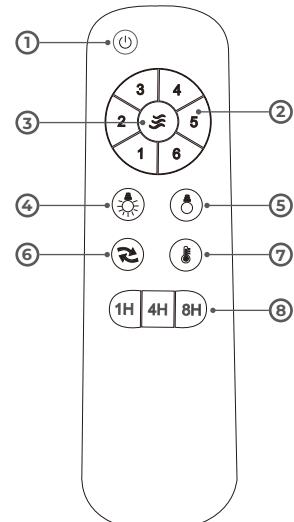


WALL CONTROL ACCESSORIES

6WC-DIM



6WC-DIM DIMENSIONS

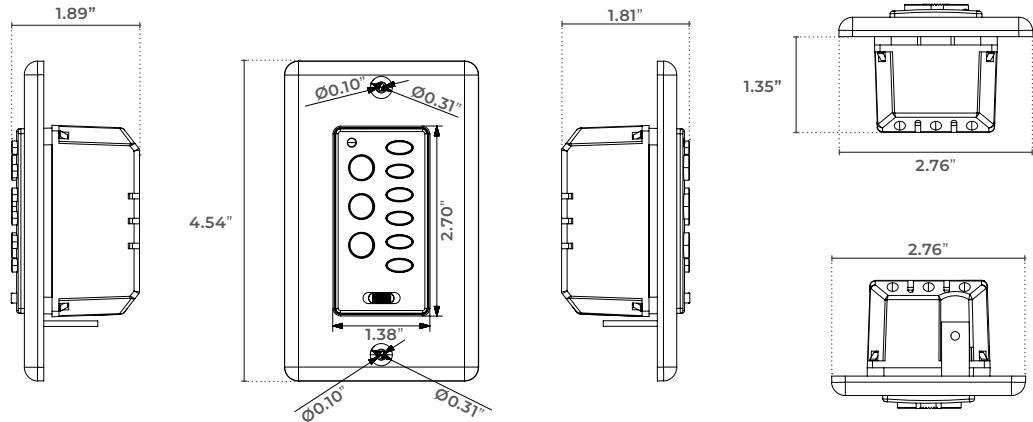

ADDITIONAL IMAGERY

CIRRUS-SN



CIRRUS-BK



CIRRUS-WH

