



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.

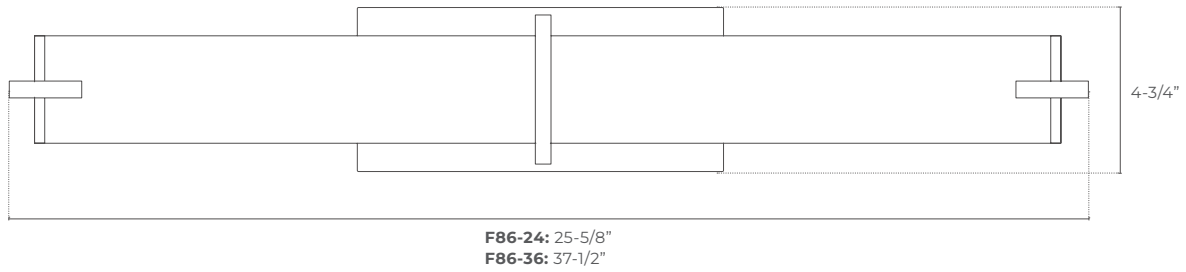


WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

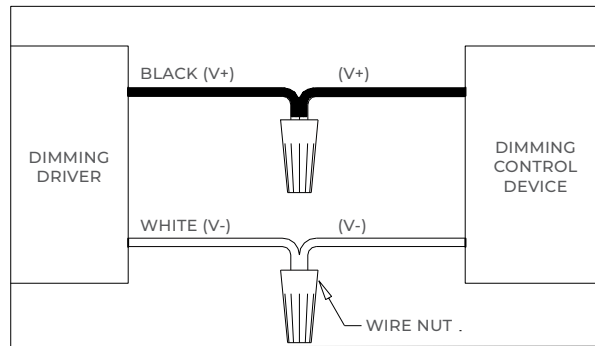
This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS



DIMENSIONS

TOOLS NEEDED FOR INSTALLATION

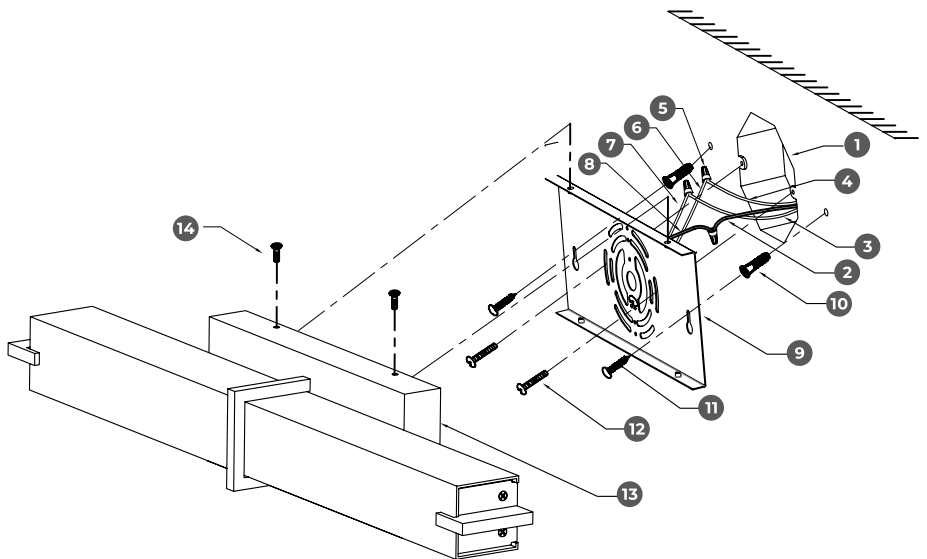
- Philips Screwdriver
- Wire Stripper

ELECTRICAL CONNECTION

RECOMMENDED DIMMERS:

- Leviton #IPL06
- Leviton #6674
- Lutron #DVCL-153P

INSTALLATION INSTRUCTIONS

- A)** Turn off power. ⚡
- B)** Loosening the 4 screws (#14) on both sides of the fixture body (#13), then remove the mounting plate (#9) from the fixture body (#13).
- C)** Pull the supply wires (#2) & (#4) and supply ground wire (#3) out from the junction box (#1). Position the mounting plate (#9) over the junction box (#1). Feed the two mounting screws (#12) in the junction box (#1) until the mounting plate (#9) is flush with the junction box (#1). Secure the anchor screws (#11) to the anchors embedded in the wall.
- D)** Make the wiring connections: connect the white supply wire (#2) to the white fixture wire (#8); connect the black supply wire (#4) to the black fixture wire (#6); connect the supply ground wire (#3) to the fixture ground wire (#7) using wire connectors (#5).
- E)** Carefully tuck all wires back in the junction box (#1). Place the fixture body (#13) over the mounting plate (#9) and secure it with 4 screws (#14).
- F)** Installation complete. 🏠


PARTS

- | | |
|------------------------------|-----------------------|
| 1. Outlet Box (Not Included) | 8. White Fixture Wire |
| 2. White Power Supply | 9. Mounting Plate |
| 3. House Ground Wire | 10. Anchors |
| 4. Black Supply Wire | 11. Anchor Screws |
| 5. Wire Connectors | 12. Mounting Screws |
| 6. Black Fixture Wire | 13. Fixture Body |
| 7. Fixture Ground Wire | 14. Screws |

SAVE THESE INSTRUCTIONS
