

### IMPORTANT SAFETY PRECAUTIONS

**Before you begin, read these instructions completely and carefully.**

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.




**WARNING:** To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

**SAVE THESE INSTRUCTIONS**



## DIMENSIONS

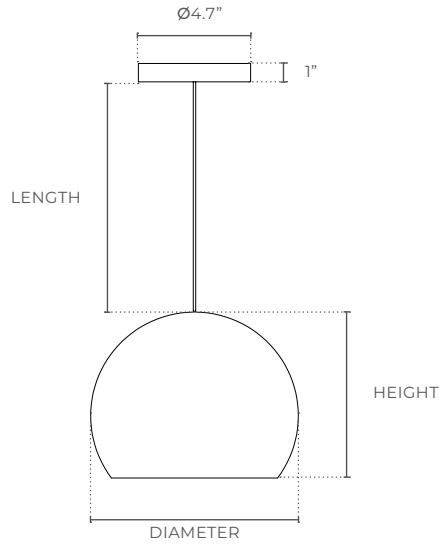


### DIMENSIONAL DATA

SIZE	DIAMETER inches	HEIGHT inches	LENGTH inches
Small	7.9	6.7	59.0
Medium	9.8	7.9	59.0
Large	11.8	8.7	59.0
Extra Large	13.8	9.8	59.0

## INSTALLATION INSTRUCTIONS

- 1) Install the mounting bracket (D) onto the junction box (A).
- 2) Make electrical connections (G). Refer to electrical connections diagram. White supply wire to white fixture wire. Black supply wire to black fixture wire. Bare or green ground supply wire to bare or green fixture ground wire.
- 3) Install the canopy (I) onto the mounting bracket (D) by aligning holes in canopy with the mounting screws (C) on the mounting bracket (D). Secure with decorative nuts (F).
- 4) Screw E26 lamp (K) into socket (J).
- 5) Installation complete. 🏠

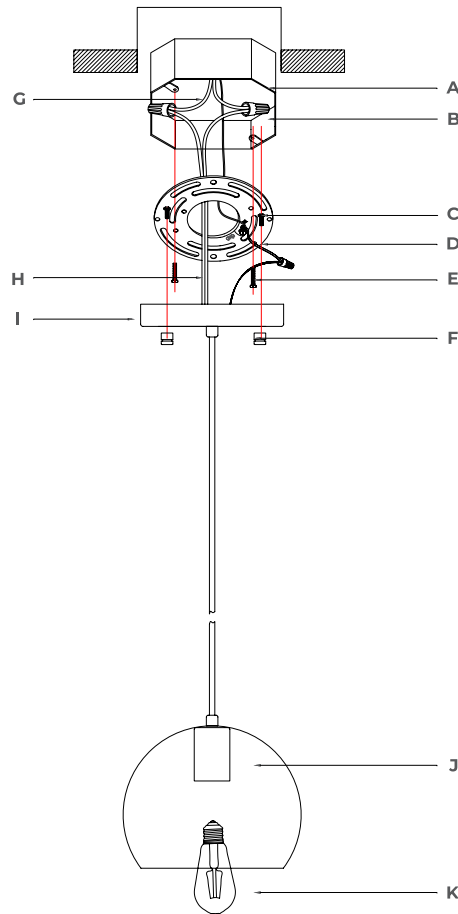


PART NO.	PART DESCRIPTION	QTY
A	Junction Box	0
B	Wire Nuts	3
C	Mounting Screws	2
D	Mounting Bracket	1
E	Studs	2
F	Ball Nuts	2
G	Leading Wires	0
H	Wires	2
I	Canopy	1
J	Sockets	1
K	Light Bulb	0

**SAVE THESE INSTRUCTIONS**



**ELECTRICAL CONNECTIONS**

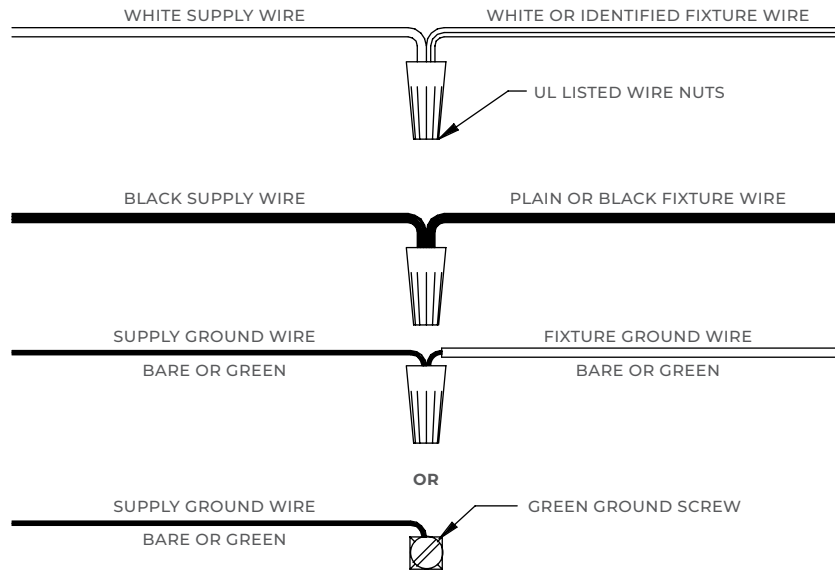

**SAVE THESE INSTRUCTIONS**

