



RoHS
Compliant



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS



DIMENSIONS

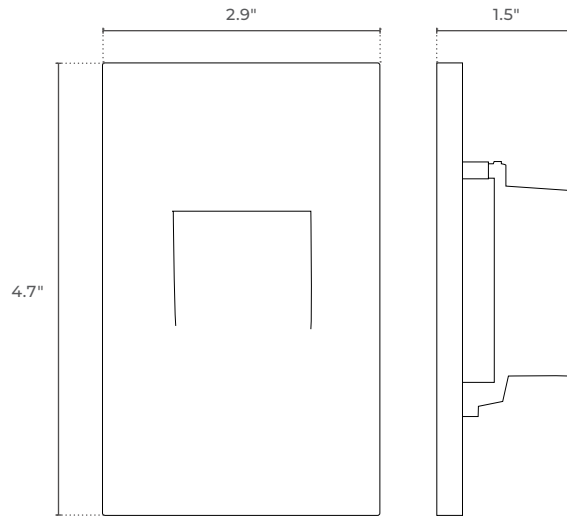

INSTALLATION INSTRUCTIONS

A) Feed the power supply wires through the junction box (1). Secure the mounting bracket (3) onto the junction box (1) using the mounting screws (2).

B) Use the wire nuts to connect fixture wires (6) to the power supply wires (7). Carefully tuck the wires inside the junction box.


C) Select the color temperature using the toggle switch.

Note: Be certain you have selected the desired CCT on all fixtures prior to installing. Once fixture is installed, removing it to change CCT may result in a damaged fixture.

D) Snap the face plate (5) onto the fixture.


E) Use sealant (not included) to fill the gap between the face plate (5) and junction box(1) to improve water resistance.

F) Installation is complete. 

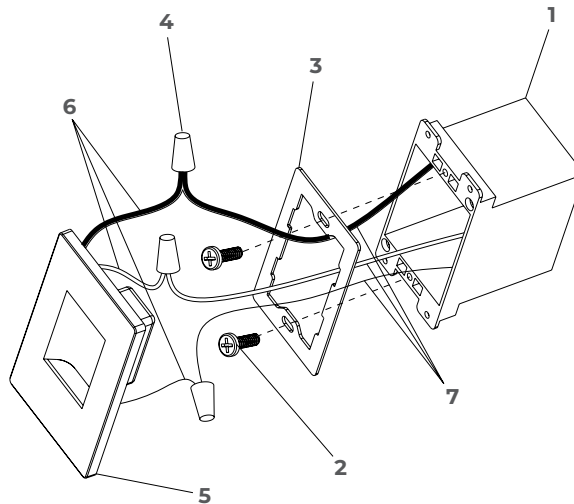

FIXTURE PARTS

1. Junction Box (Not Included)
2. Mounting Screws
3. Mounting Bracket
4. Wire Nuts
5. Face Plate
6. Fixture Wire:
 - White Fixture Wire
 - Black Fixture Wire
 - Green Fixture Wire
7. Supply Wires:
 - Neutral Wire
 - Live Wire
 - Ground Wire
8. Toggle Switch

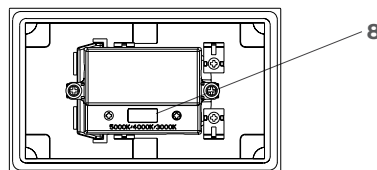

SAVE THESE INSTRUCTIONS

