


PROJECT	DATE
<input type="text"/>	<input type="text"/>
COMMENTS	
<input type="text"/>	

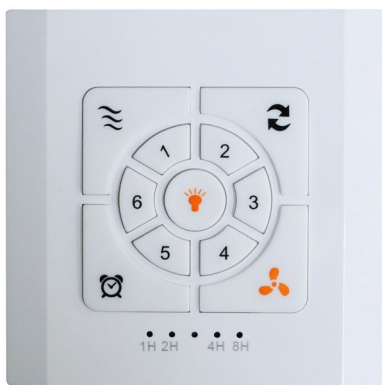

6WC-WH FAN AND LIGHT WALL CONTROL

6WC-WH is a combo fan speed and light kit wall control that pairs with the BLAZE, IBIS, FOG, and MALLARD fans. Functions include 6-speed motor settings, on/off fan control, on/off LED light kit control, direction of fan, natural wind (automatic speeds), and a timer. 6WC-WH controls the fan via a unique radio frequency that is paired at the factory to ensure 6WC-WH only controls the fan it is paired with.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	PC
Weight	0.28 lbs
Mounting	Wall Mounted (Surface or Recessed) Mounts to 86x86mm Wall Switch Box (Not Included)

ELECTRICAL

Voltage	120V 50/60Hz
Radio Frequency	433.92MHz

COMPATIBLE FANS

BLAZE CEILING FAN LED	IBIS CEILING FAN LED
FOG CEILING FAN LED	MALLARD CEILING FAN E26

ORDERING LOGIC


EX: 6WC-WH

FAMILY

6WC-WH



DIMENSIONS

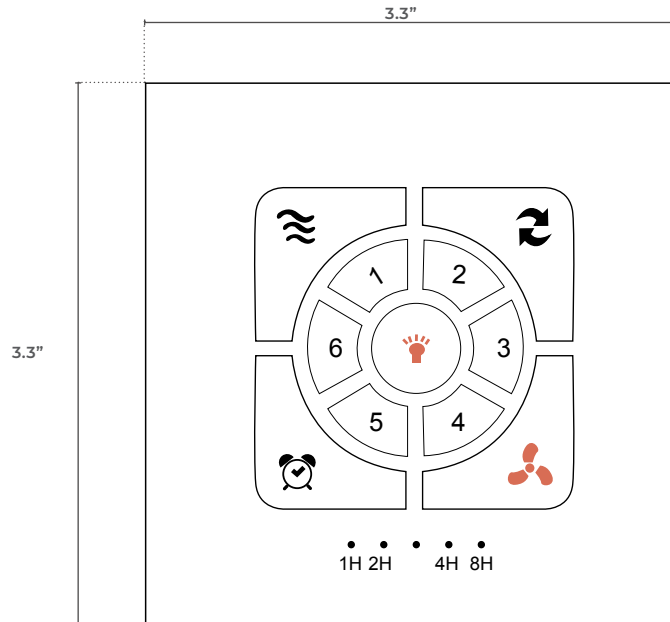

WALL CONTROL FUNCTIONS

1. Natural Wind: Automatic Fan Speeds
2. Fan Speed Settings (1 / 2 / 3 / 4 / 5 / 6)
3. Timer (1 hr / 2 hr / 4 hr / 8 hr)
4. Reverse Fan Direction (Reverse Switch)
5. Light ON/OFF Function
6. Fan ON/OFF Function
7. LED Indicator

