



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS




DIMENSIONS

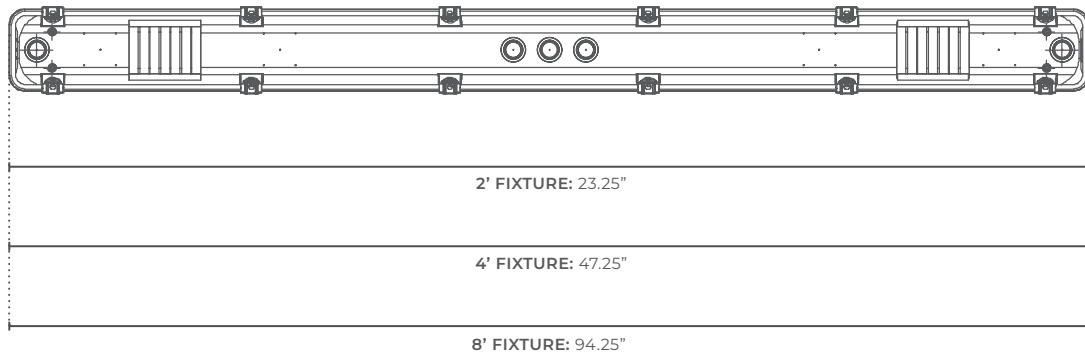


MOUNTING TYPE

Surface Mount




Suspended Mount

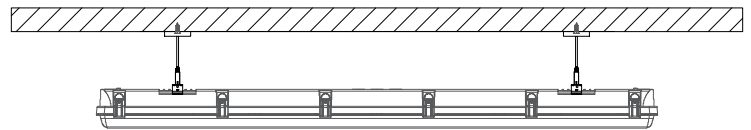


DISASSEMBLY (1-2) / ASSEMBLY (2-1)

1. Open the latches

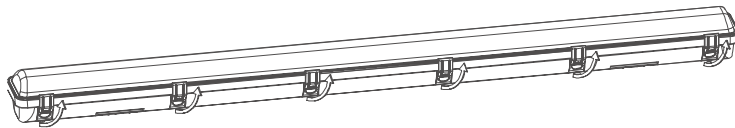

2. Remove the upper lens part

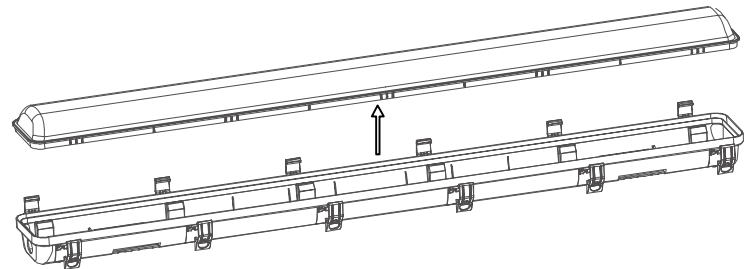


SAVE THESE INSTRUCTIONS




WIRING DIAGRAM

Applied for dimming version (without sensor)

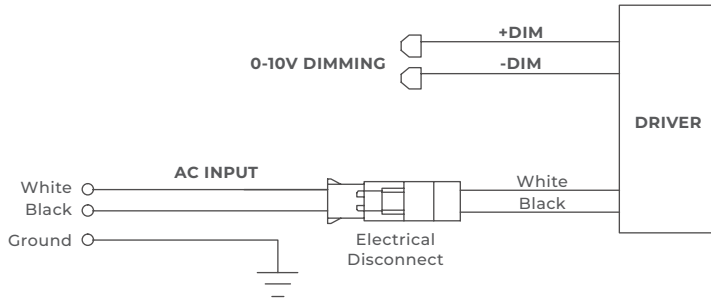


Applied for non-dimming version or dimming version with dimming sensor

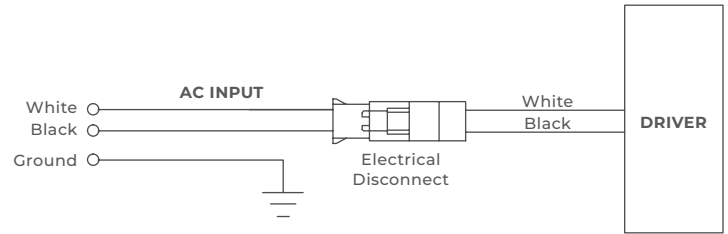


SURFACE MOUNTED INSTRUCTIONS


A) Release clips and take brackets off of the lamp.



B) Replace and lock clips.



C) Screw the mounting bracket into the ceiling with provided screws. Applying minimal pressure, snap fixture into secure mounting brackets.

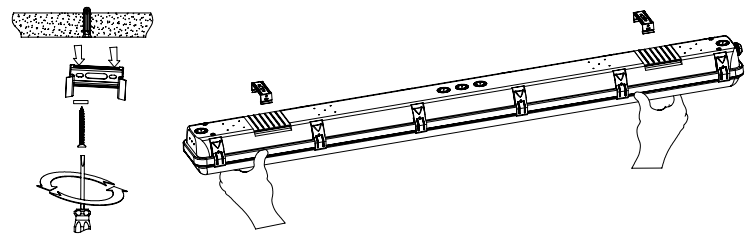


KEY




SUSPENDED MOUNT INSTALLATION


A) Release clips and take brackets off of the lamp.




B) Replace and lock clips.




C) Attach V-Hook to the suspension chains.



D) Attach bracket to the back of the fixture.

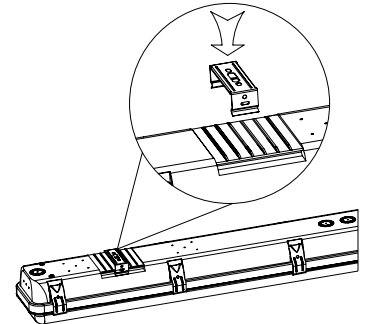

E) Attach V-Hook to the brackets.

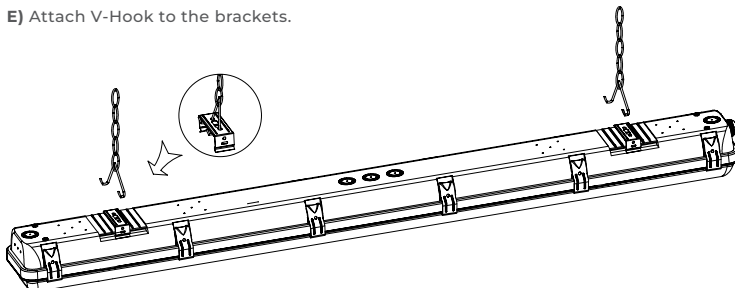




SAVE THESE INSTRUCTIONS




SUSPENDED MOUNT INSTALLATION (CHAIN)

A) Install the bracket.

B) Fasten the chain

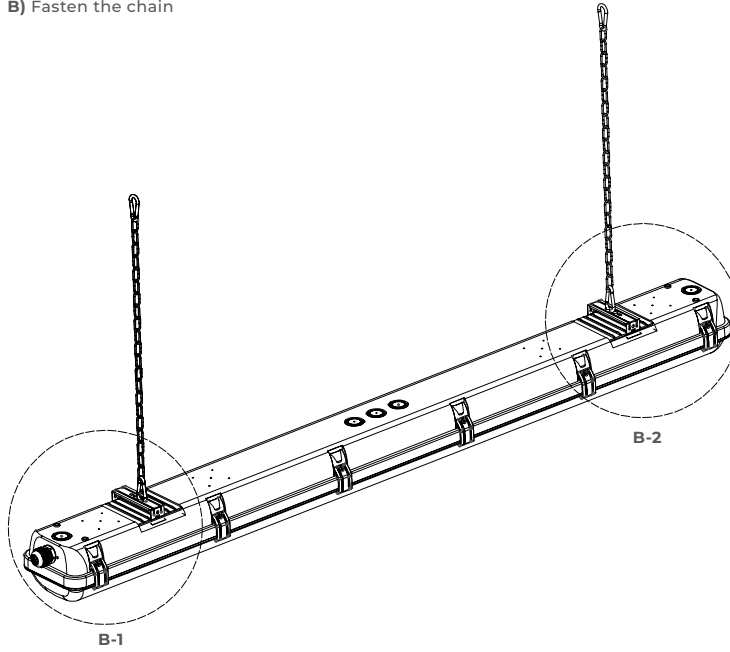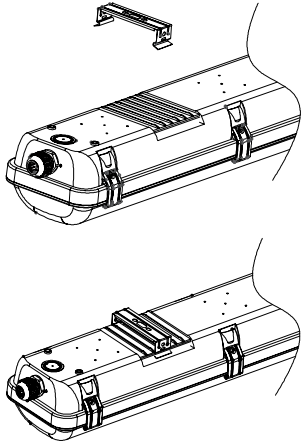


B-1




B-2

DIP SWITCH ADJUSTMENT FOR FIELD SELECTABLE CCT

DEFAULT CCT: 4000K

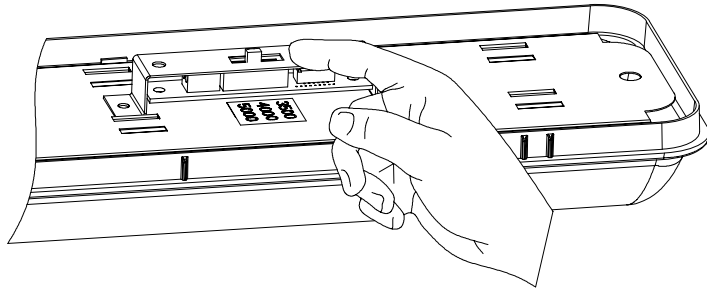

ELECTRICAL CONNECTION

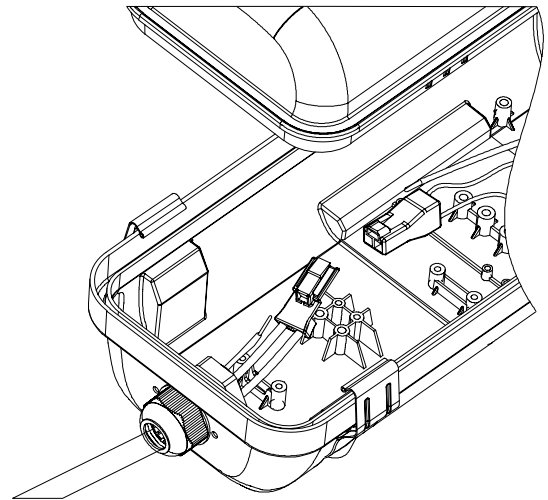

SAVE THESE INSTRUCTIONS

