
DUNTON HOUSE
DECORATIVE LIGHTING

Installation Manual

DROP-5-BN VANITY E26

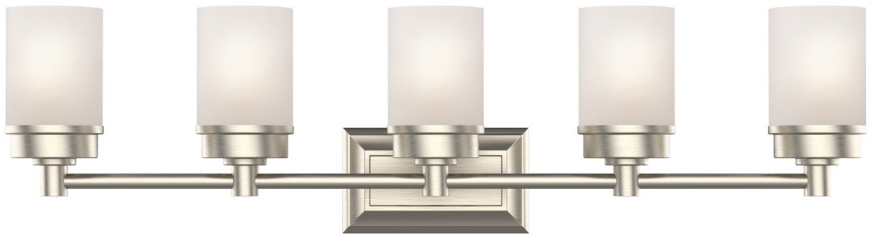


IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Electrician installation is highly recommended.
- Turn off power at the main circuit breaker panel before you begin installation.
- Install in accordance with the National Electrical Code (NEC) and all local codes.
- All glass is fragile. Handle glass shades and lamps with care.
- If you use any special control devices with this fixture, follow the control manufacturer's instructions carefully to comply with the NEC. If you have questions, contact a qualified electrical contractor.

NOTE: This is a generic instruction sheet used for various fixtures. Fixture shape and style may vary. Glass shade and diffuser shape and style may vary.

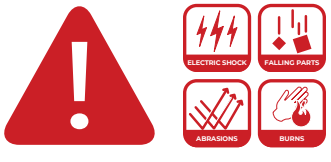

WARNING: Risk of electric shock. Turn off power at the main circuit breaker panel and verify that power is off with a voltage tester before touching any wires.


WARNING: California Proposition 65: This product contains lead, a chemical known to the State of California to cause cancer and birth defects or other reproductive harm. Do not place the product in your mouth. Wash your hands after handling this product.

SAVE THESE INSTRUCTIONS

REV 2026 1106
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SAGE BRANDS FOR UP TO DATE DETAILS.
DUNTON HOUSE DECORATIVE LIGHTING - A DIVISION OF SAGE BRANDS · **DH.LIGHTING** | SAGE BRANDS · **SAGE.LIGHTING**

INCLUDED IN BOX / PARTS LIST

CODE	PART DESCRIPTION	QTY	NOTES
A	Junction box	0	Field-supplied
B	Wire nuts	3	
C	Mounting bracket	1	
D	Studs	2	
E	Supply wires (leading wires)	0	Field-supplied
F	Fixture wires	2	
G	Canopy	1	
H	Screws	2	
I	Nuts	2	
J	Sockets	5	Factory-installed on fixture
K	Glass shades	5	
L	Socket rings	5	
M	Lamps	0	Not included

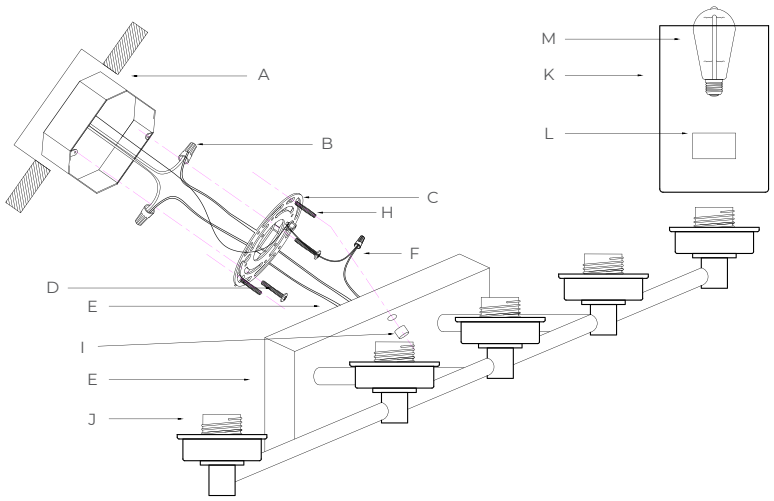

NOTE: A quantity of 0 means the part is field-supplied or sold separately. It is not missing from the carton. You must supply the junction box (A), the supply wires (E), and the lamps (M).

INSTALLATION INSTRUCTIONS

1) TURN OFF POWER
A) Turn off power to the fixture location at the main circuit breaker panel.

B) Verify that power is off with a voltage tester.

2) PREPARE THE JUNCTION BOX
A) Confirm that the junction box (A) is securely mounted and rated to support the weight of the fixture.

B) Pull the supply wires (E) out of the junction box.

CAUTION: Inspect all wires before wiring. Do not use damaged or frayed wires.

3) MOUNT THE BRACKET
A) Attach the mounting bracket (C) to the junction box (A) with the studs (D).

B) Tighten until snug. Do not overtighten.


4) MAKE WIRING CONNECTIONS
A) GROUND: Connect the bare copper or green supply ground wire to the green ground screw on the mounting bracket (C).

B) NEUTRAL: Connect the white (Neutral) fixture wire (F) to the white supply wire (E) with a wire nut (B).

C) HOT: Connect the black (Hot/Line) fixture wire (F) to the black supply wire (E) with a wire nut (B).

D) Tug each connection gently to confirm it is secure.

E) Fold the wires neatly into the junction box.

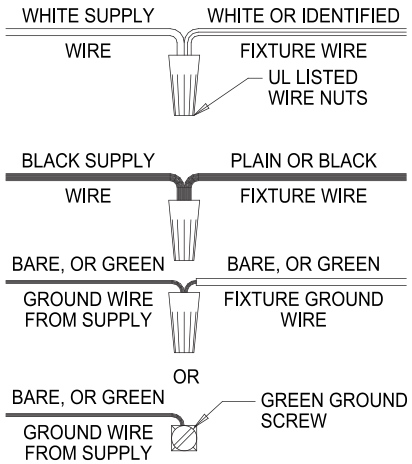

NOTE: Use UL-listed wire nuts. Wire colors and connections are shown in the diagram above.

5) MOUNT THE FIXTURE
A) Raise the fixture and slide the canopy (G) over the studs (D).

B) Secure the canopy with the nuts (I) and screws (H). Tighten until snug. Do not overtighten.

SAVE THESE INSTRUCTIONS

REV 2026 1106
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SAGE BRANDS FOR UP TO DATE DETAILS.
DUNTON HOUSE DECORATIVE LIGHTING - A DIVISION OF SAGE BRANDS · **DH.LIGHTING** | SAGE BRANDS · **SAGE.LIGHTING**

INSTALLATION INSTRUCTIONS (CONTINUED)

6) INSTALL THE LAMPS AND GLASS SHADES
A) Screw a lamp (M) into each socket (J). Use the lamp type and maximum wattage shown on the fixture label.

B) Place a glass shade (K) over each socket and secure it with a socket ring (L). Tighten by hand until snug.

7) RESTORE POWER AND TEST
A) Turn on power at the main circuit breaker panel.

B) Switch the fixture on and confirm that all lamps light.

C) If a lamp does not light, turn off power and recheck the wiring and lamp installation.

SAVE THESE INSTRUCTIONS

REV 2026 1106
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SAGE BRANDS FOR UP TO DATE DETAILS.
DUNTON HOUSE DECORATIVE LIGHTING - A DIVISION OF SAGE BRANDS · **DH.LIGHTING** | SAGE BRANDS · **SAGE.LIGHTING**