



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS

DIMENSIONS

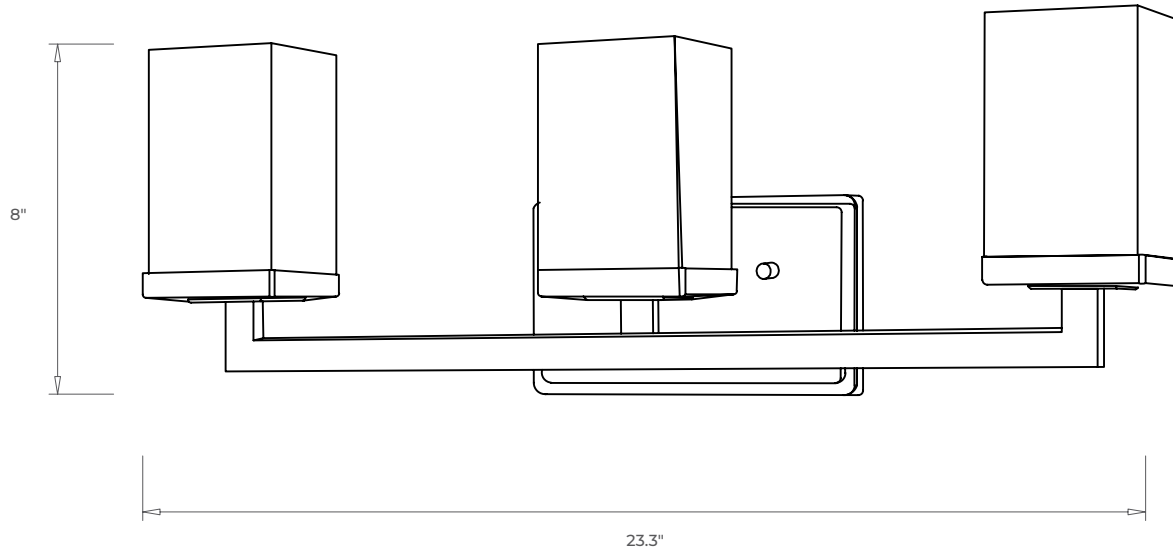

INSTALLATION INSTRUCTIONS

ATTENTION: If the external flexible cable or cord is damaged. It shall be replaced by the manufacturer to avoid any risks. This luminaire is for indoor use only.

1) Fasten mounting plate to junction box with provided screws.

2) Make electrical connections with provided wire nuts and gently insert wires back into junction box.

3) Install canopy over junction box and mounting plate by aligning threaded rods from mounting plate so they pass through the decorative canopy. Use the provided nuts to secure the canopy to the mounting bracket.


4) Carefully remove glass shades from packaging and place each shade so the lamp socket is inserted through the circular hole on the bottom of each shade.

5) Place the provided socket washer over each socket.


6) Use the provided threaded socket nut to secure the socket washer, glass shade, and lamp socket together. Make sure each assembly is well tightened and all glass shades are straight and aligned for a consistent look.

7) Screw the lamp into the socket.

8) Installation complete. 

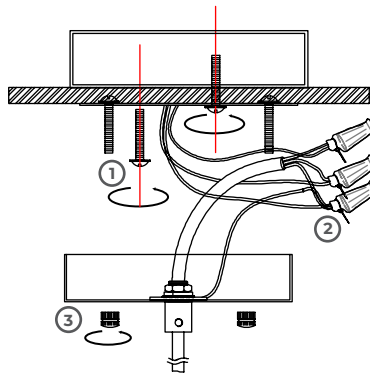

KEY

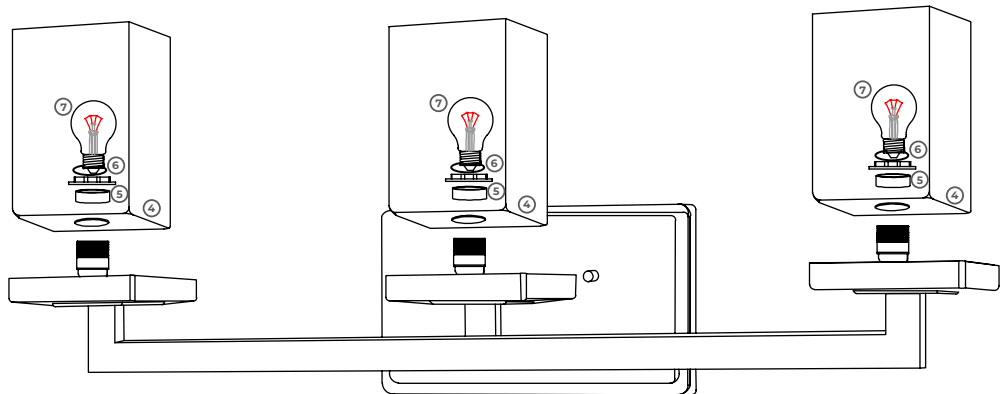

SAVE THESE INSTRUCTIONS