

# TERRAIN

## SITE LIGHTING

PROJECT

DATE

COMMENTS



DISCONTINUED



### ENERGY CHART

SIZE	HEIGHT inches	WIDTH inches	DEPTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
10	6.7	5.6	3.2	1088	10	108.8
15	6.7	5.6	3.2	1645	15	109.7
20	6.7	5.6	3.2	2105	20	105.3
30	8.0	6.5	3.2	3048	30	101.6
40	10.2	7.8	5.0	4081	40	102.0
50	10.2	7.8	5.0	4993	50	99.9
80	11.8	9.4	5.0	7801	80	97.5

## WPS WALL PACK SLIM LED DUSK-TO-DAWN

The WPS Series Wall Pack offers an IP65 wet location rated outdoor LED luminaire with photocell included.

- Hospitality
- Commercial
- Residential

### PHYSICAL

Material	Die-Cast Aluminum Housing
Mounting	Wall Mount
Reflector	Zero-Uplight Forward Throw Reflector
Finish	Powder Coated: Black, Bronze, White
CCT	4000K
CRI	70+
Beam Angle	120°

### PERFORMANCE

Warranty	5 years
Certifications	CUL, DLC, Dark Sky Approved
IP Rating	IP65
Rated Life	50,000 hours

### ELECTRICAL

Wattage	10W, 15W, 20W, 30W, 40W, 50W, 80W
Voltage	120-277V

### ORDERING LOGIC


EX: WPS-10-BK

FAMILY	WATTAGE	FINISH
WPS		
	10 10W	BK Black
	15 15W	BZ Bronze
	20 20W	WH White
	30 30W	
	40 40W	
	50 50W	
	80 80W	




DIMENSIONS


Front

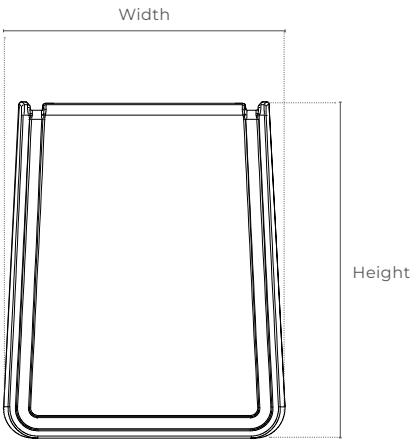

45° Angle

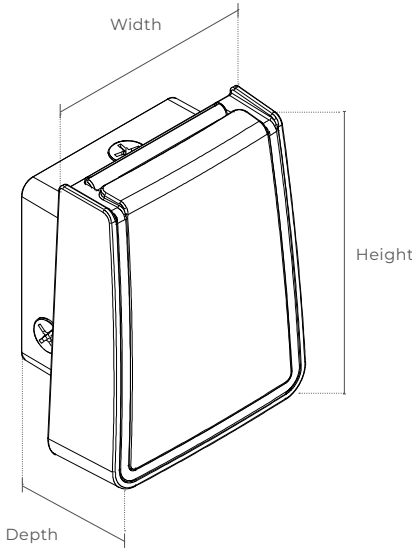

Side

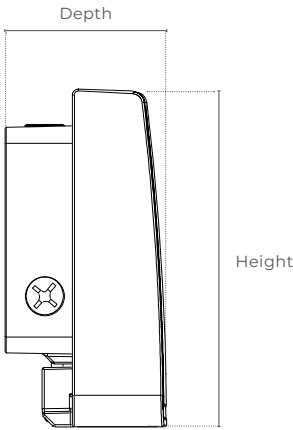

Bottom

