

PROJECT	DATE
COMMENTS	


IN STOCK

ENERGY CHART

SIZE	DIAMETER inches	DEPTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
3	4.3	2.3	700	8	87.5

ORDERING LOGIC

EX: RSA-3-27-24-BK

FAMILY	SIZE	CCT	BEAM ANGLE	TRIM FINISH
RSA	3			
	3	3"	27	2700K
			24	24°
			BK	Black
	30	3000K	36	36°
	40	4000K	WH	White
	50	5000K		

RSA RECESSED ADJUSTABLE DOWNLIGHT LED

The RSA series is a 3" round recessed adjustable LED downlight offered in two finishes. Ideal for accent lighting applications where vertical illumination is required for highlighting architecture and artwork.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Aluminum
Mounting	Recessed
Trim Finish	Black or White
Source	LED

PERFORMANCE

Warranty	3 years
Certifications	ETL
IP Rating	IP44
Operating Temperature	-20°C to 45°C (-4°F to +113°F)
CCT	2700K, 3000K, 4000K, 5000K
Beam Angle	24°, 36°
Adjustability	Rotation: 360° / Tilt: 30°

ELECTRICAL


Wattage	8W
Voltage	120V
Power Factor	>0.90
Dimmable	100-10% Triac Dimming

**ACCESSORIES ORDERING LOGIC
(ORDER SEPARATELY)**

EX: RSA-NC

FAMILY	ACCESSORIES
RSA	NC New Construction Housing

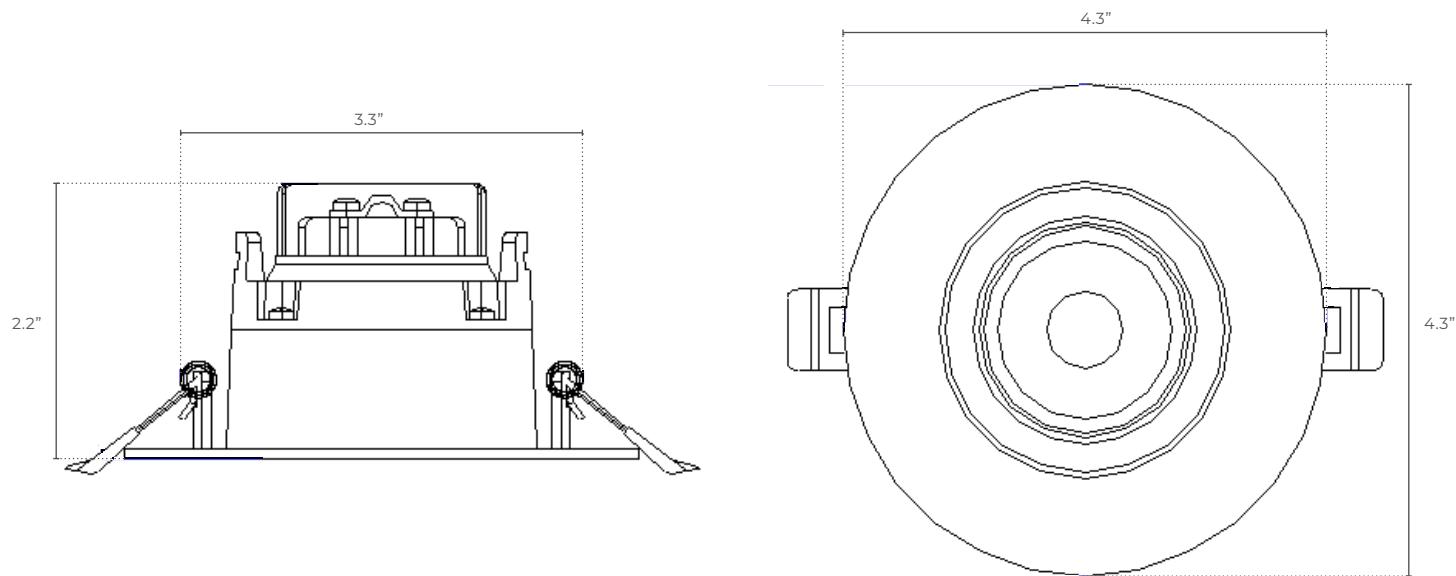

DIMENSIONS

ADDITIONAL IMAGERY
RSA-3-XX-XX-WH & RSA-NC
White Finish in New Construction Housing

RSA-3-XX-XX-BK & RSA-NC
Black Finish in New Construction Housing

RSA-NC
New Construction Housing

COMPATIBLE DIMMERS

- Lutron(DV-603P)
- Leviton(DSL06)

REMOTE DRIVER DIMENSIONS
