

PROJECT

DATE

COMMENTS



ENERGY CHART

SPEED SETTING	1	2	3	4	5	6
RPM	101	120	141	161	180	198
Amps	0.06	0.08	0.12	0.17	0.24	0.31
Wattage	7.70	10.30	15.50	22.50	33.70	43.70
CFM	6000	6000	6200	6300	6500	7000
CFM/Watts	0.89	0.89	0.9	0.91	0.92	0.93

ORDERING LOGIC

EX: MALLARD-30-AL-WD

FAMILY	LIGHT KIT / CCT	HOUSING FINISH	BLADE FINISH
MALLARD			
	30 3000K	AL Aluminum	WD Wood
	40 4000K	BK Black	SN Satin Nickel
	FS Field Selectable 3000K / 4000K / 6500K (With Remote Control or Wall Control)	BN Brushed Nickel	
	NL No Light Kit CAP PROVIDED	WH White	

MALLARD CEILING FAN LED

Mallard is an interior rated 52-inch five blade ceiling fan with a 6-speed DC motor and multiple finish options. Mallard comes standard with a single CCT or 3CCT selectable LED light kit and a remote control.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Metal
Blade Material	5 Plywood Blades
Mounting	Suspended
Fan Diameter	52"
Source	LED
Housing Finish	Aluminum, Black, Brushed Nickel, White
Blade Finish	Satin Nickel, Wood
Sloped Ceiling Accommodation	30°

PERFORMANCE

Warranty	10 years for motor, 2 years for light kit, blade, housing, and cap
Certification	Dry Location, ETL
Rated Life	L70 >36,300 hours
CCT	3000K, 4000K, 6500K, Field Selectable with Remote Control
Dimmable	Yes
Features	Low Noise
Reversible	Yes

ELECTRICAL

Light Kit Wattage	20W
Motor Wattage	35W
Total Wattage	55W
Voltage	120V
Motor	DC Motor
Control	6-Speed Remote Control Included


ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

EX: 6WC-DIM

ACCESSORIES
6WC-DIM 6-Speed Fan and Light Kit Dimmer Wall Control CLICK HERE FOR ACCESSORY SPEC SHEET



DIMENSIONS

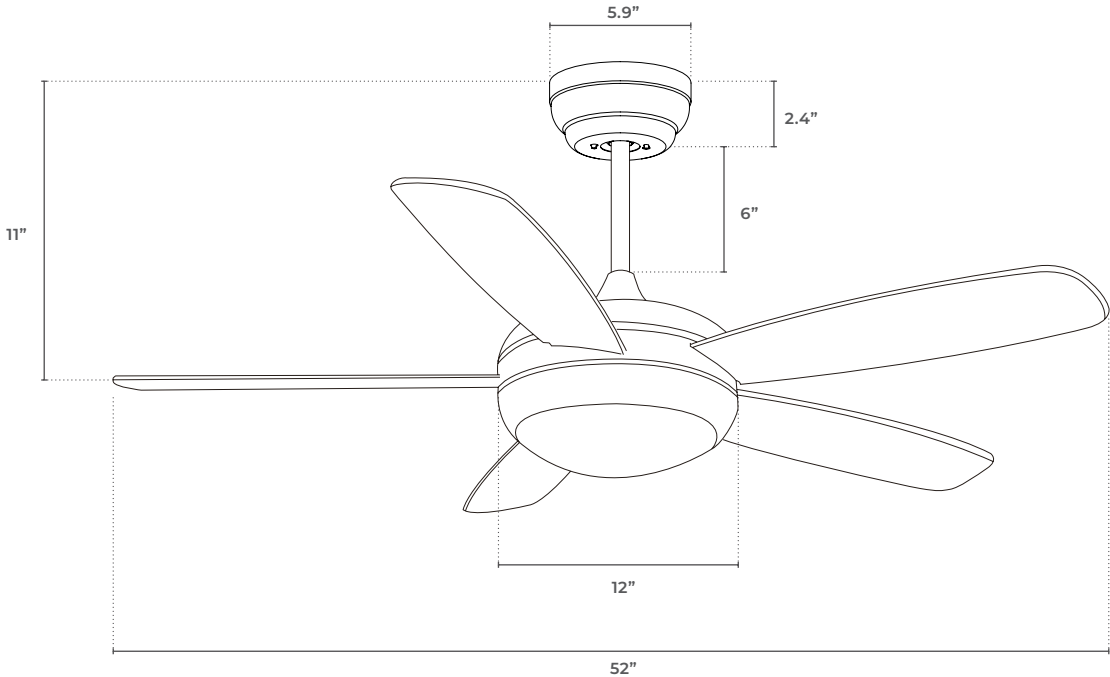


STANDARD REMOTE CONTROL



FUNCTIONS


1. Switch Indicator
2. Fan Speed Settings (1: Lowest / 6: Highest)
3. Fan ON/OFF Function
4. Reverse Fan Direction (Reverse Switch)
5. Natural Wind: Automatic Fan Speeds
6. Light ON/OFF Function
7. Timer (1 hr / 4 hr / 8 hr)
8. Battery for Switch (AAA 1.5V)

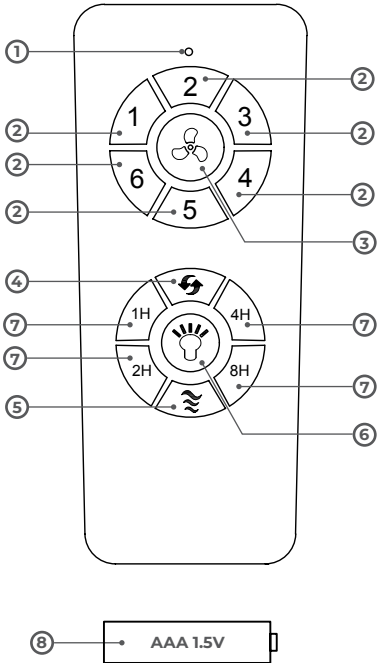

WALL CONTROL ACCESSORIES

6WC-DIM

6WC-DIM DIMENSIONS

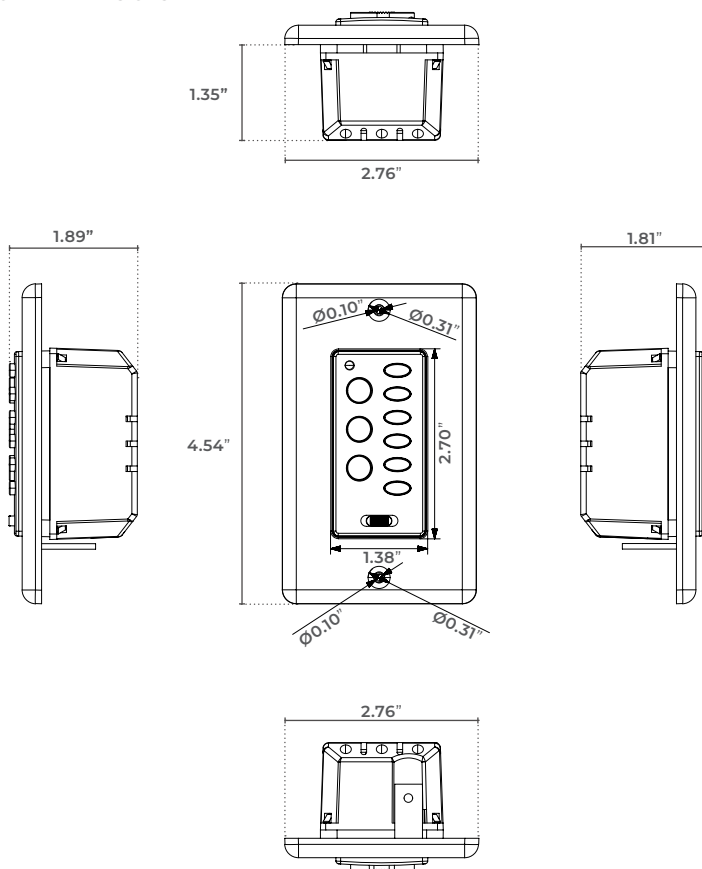

ADDITIONAL IMAGERY

