

DTW-1828 DIM TO WARM 1800K-2800K LED TAPELIGHT CONSTANT VOLTAGE

The DTW-1828 is a flexible LED ribbon line that offers Dim to Warm CCT capabilities with a high, 90+ CRI.


- Dim to Warm Family
- Indoor / Outdoor
- 95 lm/w

PROJECT DATE

COMMENTS



IP20 IP67

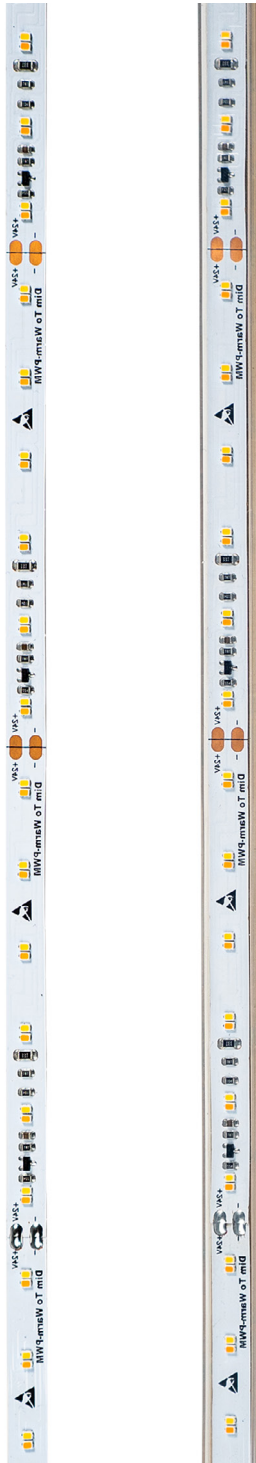

PHYSICAL

Mounting	3M Adhesive
Maximum Run	16' 4"

PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, RoHS Approved
IP Rating	IP20 or IP67
Dimming	Universal (See Recommended Drivers)
CCT	1800-2800K
CRI	90+

ELECTRICAL

Voltage	24V DC Constant Voltage Output
---------	--------------------------------

APPLICATIONS

- Cove & Perimeter Lighting
- Architectural Back Lighting
- Walls & Surfaces
- Stairs & Walkways
- Decorative Signage
- Channel Letters

ENERGY CHART


TYPE	POWER w/ft	LUMENS/FT	EFFICACY lm/w
SW-DTW-3	3.0	290	95
SW-DTW-6	6.1	579	95

ORDERING LOGIC

EX: DTW-1828-3-IP20-ST

FAMILY	TYPE	POWER	IP RATING	LENGTH
DTW	1828			ST
	1828	1800K-2800K	3 3.0W/Ft 6 6.1W/Ft	IP20 IP20 IP67 IP67
				ST 16'; Cut in Field STANDARD

CONNECTION DRAWINGS OF SINGLE COLOR

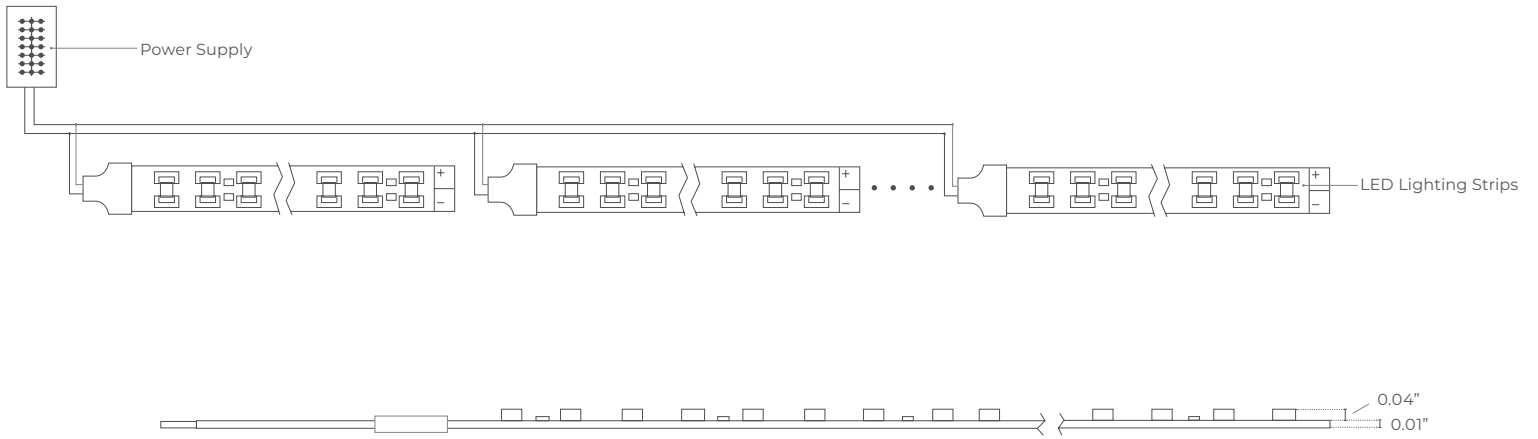

RECOMMENDED DRIVERS

D-60W
60W Constant Voltage LED Driver 5 In 1 Dimming Function



D-60W-ND
60W Constant Voltage LED Driver Non-Dimming



D-96W
96W Constant Voltage LED Driver 5 In 1 Dimming Function



D-300W
300W Constant Voltage LED Driver 5 In 1 Dimming Function

