

SW-3S STATIC WHITE LED TAPELIGHT 3-STEP MACADAMS ELLIPSE

The SW-3S is a flexible LED ribbon line that offers low to medium output, high CRI and offers a variety of color temperatures.

- Static-White Family
- 3-Step MacAdams
- Indoor / Outdoor

PROJECT

DATE

COMMENTS



IP20

IP67



PHYSICAL

Mounting	3M Adhesive
Cut Length	Varies, See Back
Maximum Run	16' 4"

PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, RoHS Approved
IP Rating	IP20 or IP67
Operating Temperature	-20°C to 60°C (-4°F to 140°F)
Dimming	Universal (See Recommended Drivers)
CCT	2200K, 2700K, 3000K, 3500K, 4000K
CRI	90+
Chromaticity	3-Step MacAdams

ELECTRICAL

Voltage	24V DC Constant Voltage Output
---------	--------------------------------

APPLICATIONS

- Cove & Perimeter Lighting
- Architectural Back Lighting
- Walls & Surfaces
- Stairs & Walkways
- Decorative Signage
- Channel Letters

ENERGY CHART


TYPE	POWER w/ft	LUMENS/FT	EFFICACY lm/w
3S-1	1.5	122	88
3S-3	3.0	244	88
3S-4	4.5	335	88
3S-6	6.0	488	88
3S-7	7.5	640	88

ORDERING LOGIC


EX: SW-3S-1-22-IP20-ST

FAMILY	TYPE	POWER	CCT	IP RATING	LENGTH
SW	3S				ST
	3S 3-Step	1 1.5W/Ft	22 2200K	IP20 IP20	ST 16'; Cut in Field STANDARD
		3 3.0W/Ft	27 2700K	IP67 IP67	
		4 4.5W/Ft	30 3000K		
		6 6.0W/Ft	35 3500K		
		7 7.5W/Ft IP20 ONLY	40 4000K		

DIMENSIONS

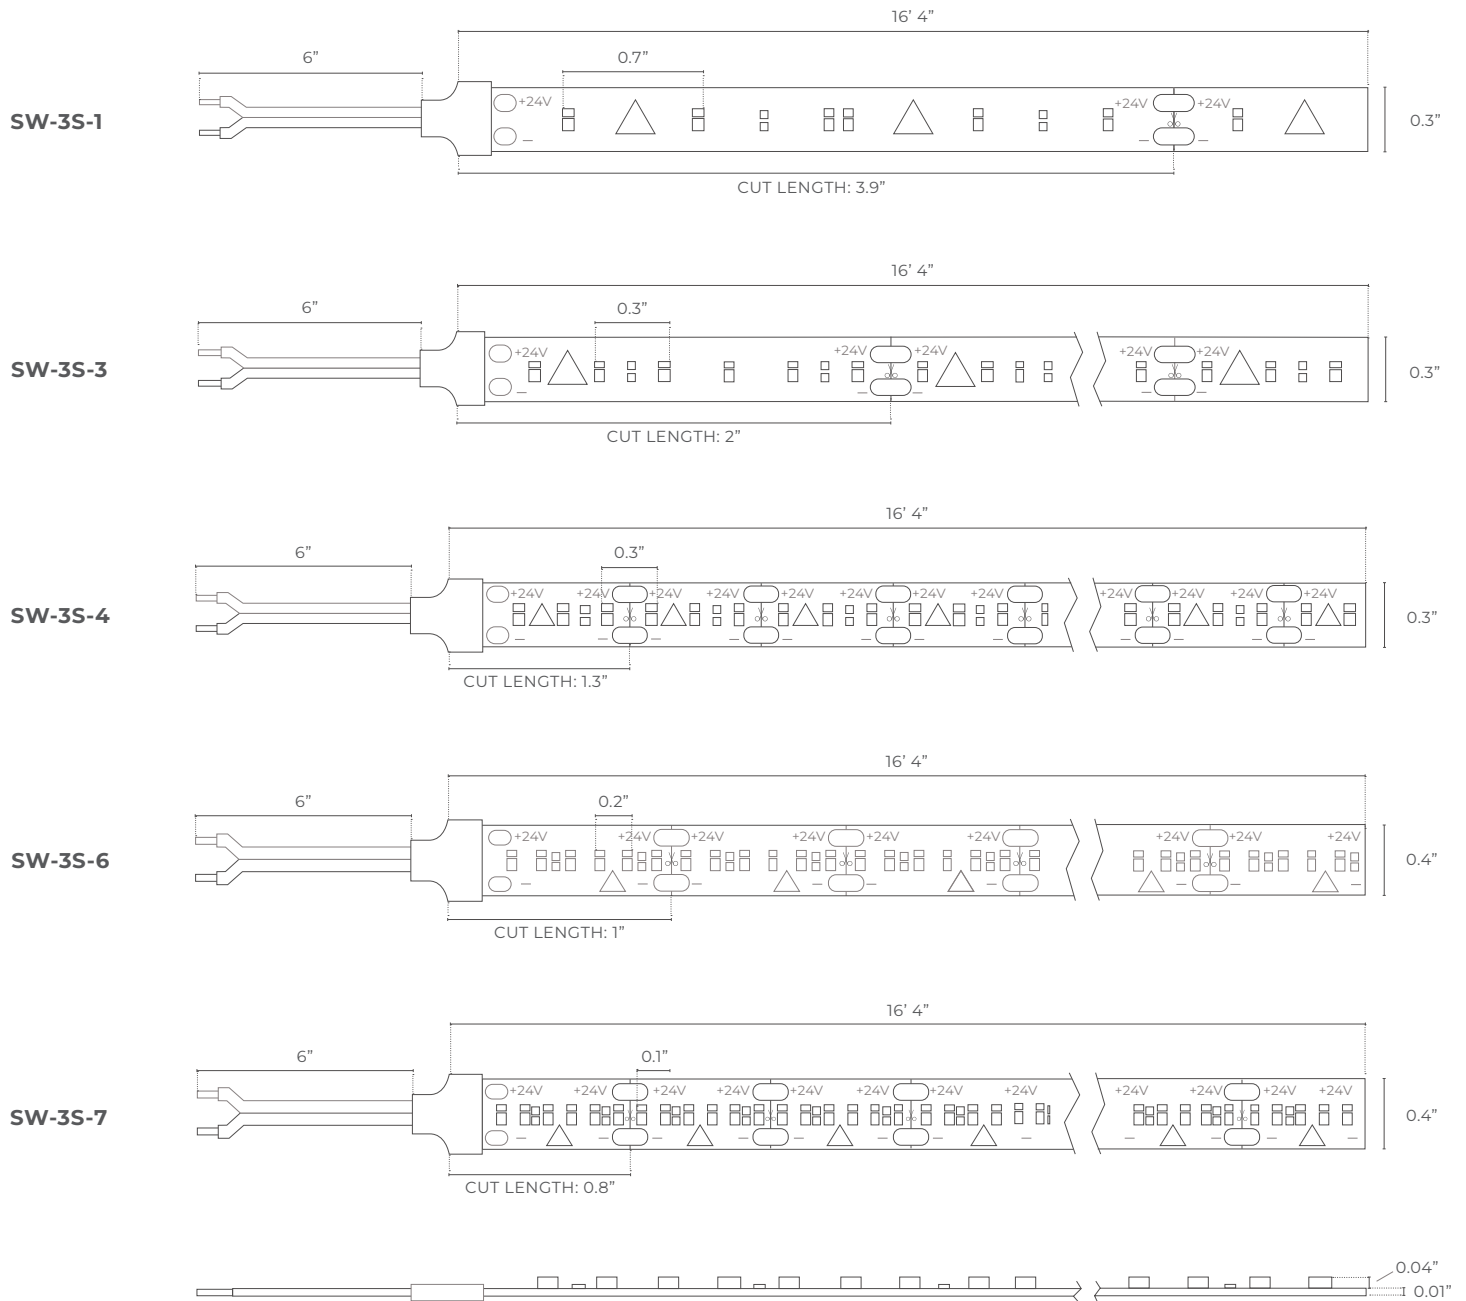

CONNECTION DRAWINGS OF SINGLE COLOR

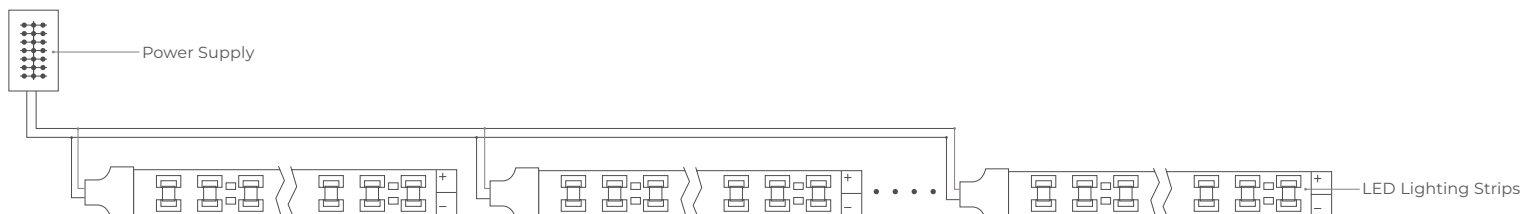

ADDITIONAL DRAWINGS

SW-3S-1




SW-3S-3




SW-3S-4



SW-3S-6



SW-3S-7



RECOMMENDED DRIVERS

D-60W

60W Constant Voltage LED Driver 5 In 1 Dimming Function



D-60W-ND

60W Constant Voltage LED Driver Non-Dimming



D-96W

96W Constant Voltage LED Driver 5 In 1 Dimming Function



D-300W

300W Constant Voltage LED Driver 5 In 1 Dimming Function

