

# SPR-WL-TL SLIM PANEL ROUND LED WET LOCATION TRIMLESS

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



SPR-WL-TL is a trimless ultra-thin flush mount luminaire that delivers sleek, even, comfortable illumination. Its field-selectable CCT enables quick color adjustments (2700K to 5000K) via a convenient switch on the back of the housing — completely hidden after installation for a clean, finished appearance. SPR-WL-TL fits 2.75 or 3.5-inch junction boxes, making it ideal for commercial, residential, and hospitality settings. It's triac dimmer-compatible, offering smooth dimming from 100% to 10% for optimal brightness control. Built with a high-quality 120V driver, it's wet location listed and comes with a 5-year warranty for dependable, energy-efficient lighting.

- Residential
- Commercial
- Hospitality



Black Finish



White Finish

## PHYSICAL

Material	Aluminum
Lens Material	Polycarbonate
Mounting	Surface Mounting (2.75 or 3.5-inch Junction Boxes)
Finish	White, Black

## PERFORMANCE

Warranty	5 years
Certifications	cETLus, Wet Location, Energy Star, Title 24
Rated Life	≥50,000hours
Operating Temperature	-4°F to 113°F (-20°C to 45°C)
CCT	Field Selectable: (2700K/3000K/3500K/4000K/5000K)
CRI	90
Beam Angle	120°

## ENERGY CHART

SIZE	DIAMETER inches	HEIGHT inches	DELIVERED LUMENS (3000K)	WATTAGE	EFFICACY lm/w
5	5.72	1.59	780	10	78
5HO	5.72	1.59	1150	10	115
7	7.5	1.59	1100	15	73.3
7HO	7.5	1.59	1400	15	93.3
9	8.88	1.59	1355	18	75.3
9HO	8.88	1.59	1600	18	88.9

## ELECTRICAL




Wattage	10W, 15W, 18W
Voltage	120V 60Hz
Power Factor	>0.9
Dimmable	Triac Dimmable 100-10%

## ORDERING LOGIC

EX: SPR-WL-TL-5-FS-WH

FAMILY	SIZE	CCT	FINISH
<b>SPR-WL-TL</b>		<b>FS</b>	
<b>5</b> 5 inch	<b>5HO</b> 5 inch - High Output	<b>FS</b> Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	<b>WH</b> White
<b>7</b> 7 inch	<b>7HO</b> 7 inch - High Output		<b>BK</b> Black
<b>9</b> 9 inch	<b>9HO</b> 9 inch - High Output		

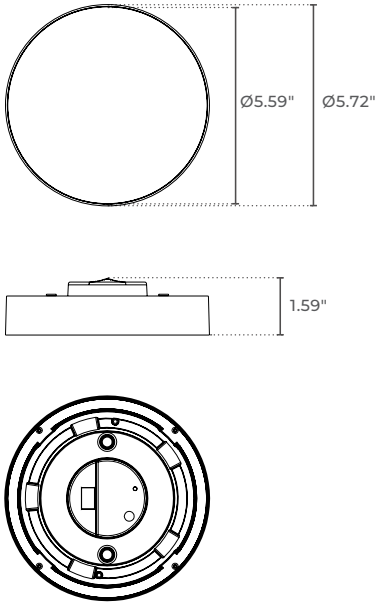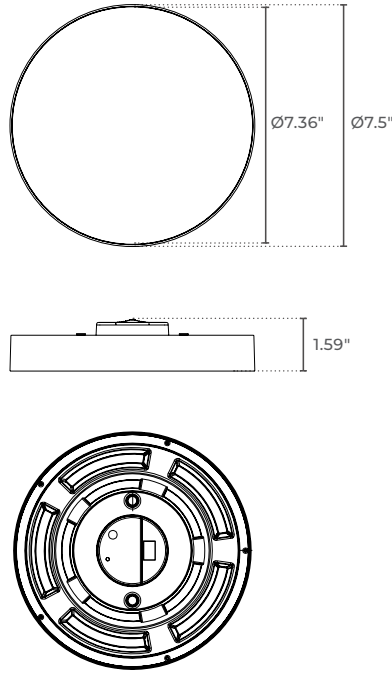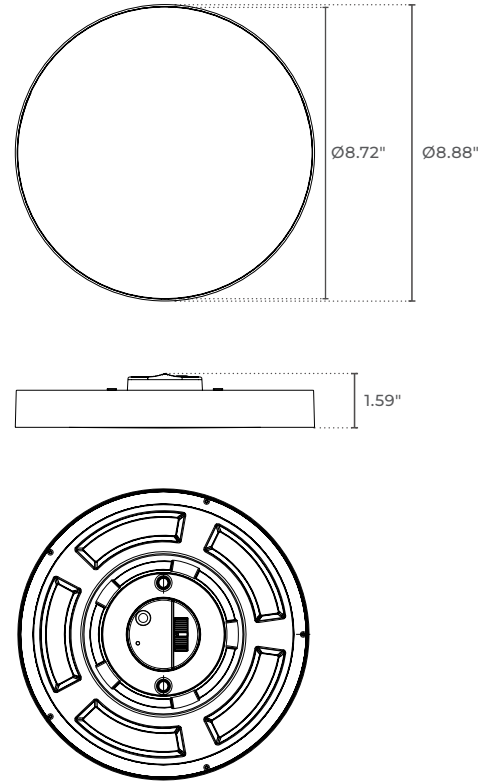

**DIMENSIONS**
**SIZE 5**

**SIZE 7**

**SIZE 9**

**RECOMMENDED DIMMERS**
**LUTRON MODELS**

- TG-600PR-WH
- CTCL-153PDH-WH
- TGCL-153PH-LA
- SLV-600P-AL
- DVCL-153P
- S2-LFSQH-WH
- CT-103PR-WH
- DVWCL-153PH


- RCL-153RNL
- CTCL-150H

**LEVITON MODELS**

- 6672
- RNL06

**MOUNTING BRACKET**

Mounting bracket, with multiple apertures, can be installed into any 2.75 or 3.5 inch junction box.

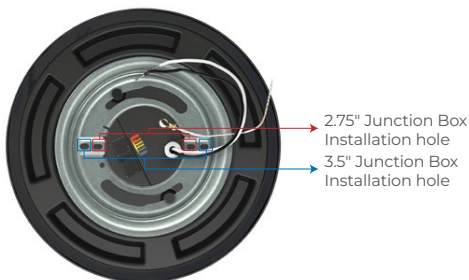
**FIELD SELECTABLE CCT**


**ACCESSORIES**
**Wire Nuts**

**Screws**

**Mounting Bracket**


ADDITIONAL IMAGERY


SIZE 5

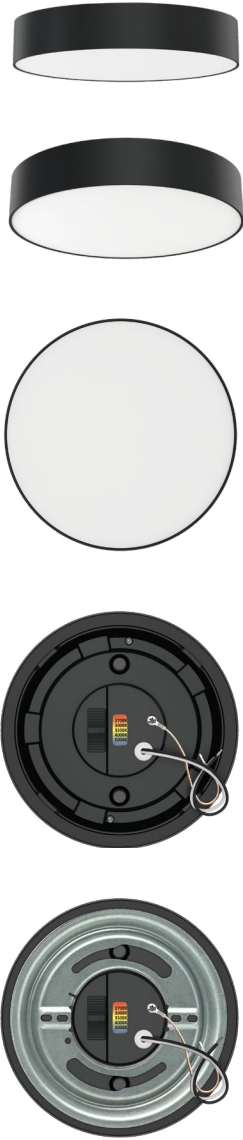

SIZE 7



SIZE 9

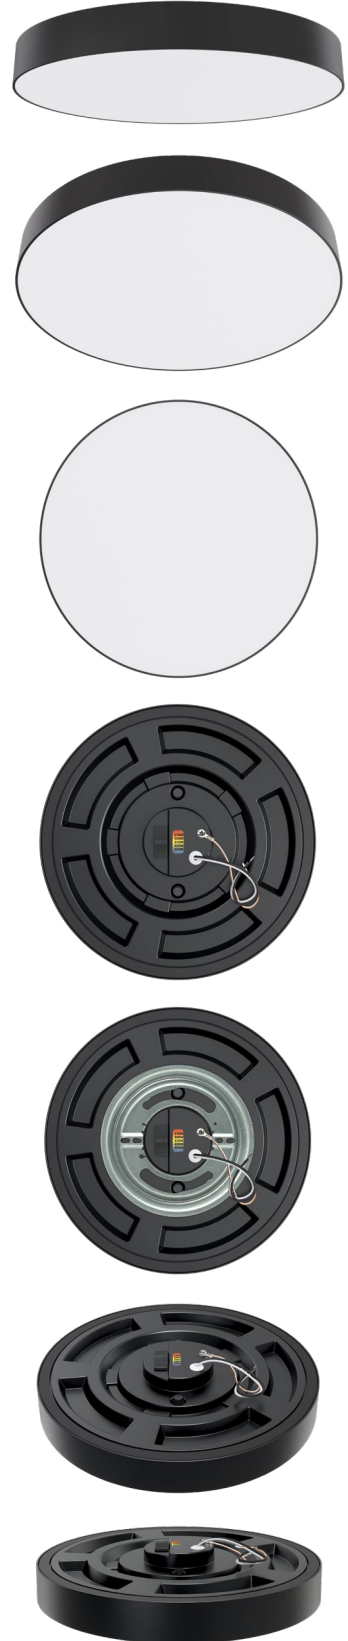

ADDITIONAL IMAGERY (CONTINUED)

SIZE 5

SIZE 7

SIZE 9

