




PROJECT  DATE

COMMENTS

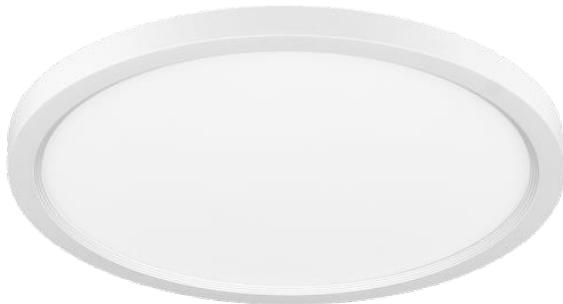

ENERGY CHART					
SIZE	DIAMETER inches	HEIGHT inches	LUMENS direct light	WATTAGE	EFFICACY lm/w
12	11.8	0.9	2160	24	90
16	15.8	0.9	3200	32	100

ORDERING LOGIC EX: FMC-12-30

FAMILY	SIZE	CCT	Custom Colors Available - Consult Factory
<b>FMC</b>			
	<b>12</b> 11.8"	<b>30</b> 3000K	
	<b>16</b> 15.8"	<b>40</b> 4000K	
		<b>50</b> 5000K	
	<b>FS5</b> Field Selectable	2700K / 3000K / 3500K / 4000K / 5000K	
	<b>FS5+AM</b> Field Selectable + Amber	FS Direct Light + Amber 2000K Indirect Light	
	<b>FS5+IB</b> Field Selectable + Ice Blue	Direct Light + Ice Blue Indirect Light	
	<b>FS5+LP</b> Field Selectable + Love Pink	Direct Light + Love Pink Indirect Light	

## FMC FLUSH MOUNT CEILING LED

The FMC Series is a low-profile, high output surface mount LED luminaire. The FMC is available with a single CCT or field selectable 5CCT direct light. FMC can also be ordered with an indirect mood/night light that is available in three standard colors or it can be customized for project needs.

- Residential
- Commercial
- Hospitality

### PHYSICAL

Material	Plastic
Mounting	Surface
Lens	Polycarbonate Diffuser
Finish	White
CCT	Direct Light: Single CCT or Field Selectable 5CCT Indirect Light (Optional): Amber 2000K, Ice Blue, Love Pink, Custom Color
CRI	80+
Beam Angle	120°

### PERFORMANCE

Warranty	5 years
Certifications	IP50 Rated, VO Fire Rating, CETL, FCC
Rated Life	L70 50,000 hours

### ELECTRICAL


Wattage	24W, 32W
Voltage	120V
Power Factor	>0.80
Dimmable	10% - 100% Triac Dimming

### ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)


FAMILY	ACCESSORIES
<b>FMC</b>	
<b>JB</b>	Integral J-Box Housing
<b>PMK</b>	Pendant Mount Kit Height: 80 inches
<b>SFMK</b>	Semi-Flush Mount Kit Height: 9 inches

**DIRECT LIGHT ONLY DIMENSIONS**


24W

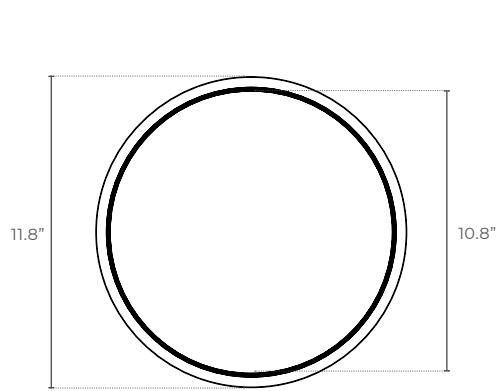

32W

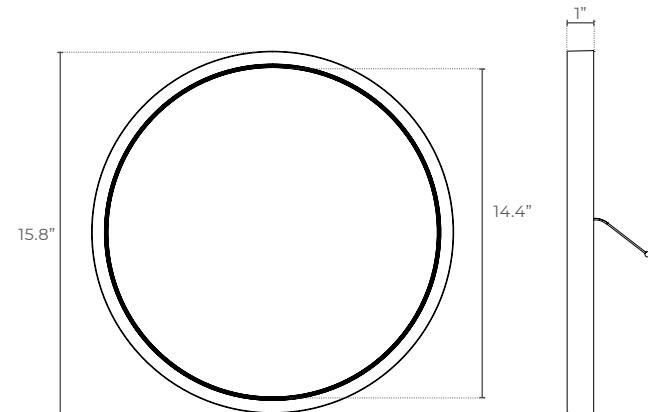
**DIRECT & INDIRECT LIGHT DIMENSIONS**

24W

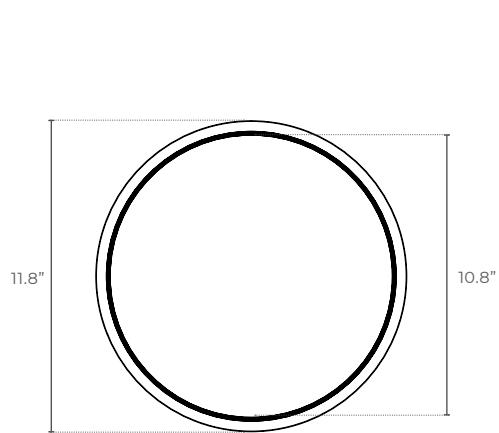

32W

