

PROJECT

DATE

COMMENTS







RoHS

Compliant

MINIMUM ORDER

50PCS

PHYSICAL	
Mirror	Copper Free, Silver Backed
Frame	Anodized Aluminum
Mounting	Wall Mount
Source	LED

PERFORMANCE	
Warranty	3 years
Certification	ETL, RoHS Compliant
IP Rating	IP44
Rated Life	50,000 hours
CCT	Single CCT: 2700K, 3000K, 4000K, 5000K, 6000K, Field Selectable 3CCT: (30K/35K/40K), Tunable White: 3000K-6000K
CRI	80+



ELECTRICAL	
Wattage	See Energy Chart on Page 2
Voltage	120V 60Hz
Power Factor	>0.9
Dimmable	Hard Wire or Touch Button

ORDERING LOGIC

EX: REFLECTIONS-2436-27

FAMILY	SIZE ¹		CCT	CONTROL OPTIONS	
REFLECTIONS					
	2436	24" X 36"	27	2700K	HWELV Hard Wire ELV Dimmable
	2432	24" X 32"	30	3000K	HW010 Hard Wire 0-10V Dimmable
	3042	30" X 42"	40	4000K	TB Touch Button Dimmable
	3636	36" X 36"	50	5000K	PB Push Button On/Off
	3648	36" X 48"	60	6000K	OS Microwave Occupancy Sensor On/Off
	3660	36" X 60"	FS3	Field Selectable 3000K / 3500K / 4000K, TOUCH BUTTON CONTROL ONLY	
	4040	40" X 40"	TW	Tunable White 3000K - 6000K, TOUCH BUTTON CONTROL ONLY	

- ORDERING NOTES
- 1

Custom sizes available upon request, consult factory for details and pricing.
- 2


50pcs minimum order quantity required if mirror not in stock.

ENERGY CHART

SIZE	WIDTH inches	HEIGHT inches	ANTI-FOG SIZE inches	CCT	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2436	24	36	13.8 X 17.7	Single	1500	LED LIGHT: 30 ANTI-FOG: 47 TOTAL: 74	50
				FS3	900	LED LIGHT: 18 ANTI-FOG: 47 TOTAL: 63	50
2432	24	32	13.8 X 15.7	Single	1400	LED LIGHT: 28 ANTI-FOG: 42 TOTAL: 67	50
				FS3	1400	LED LIGHT: 28 ANTI-FOG: 42 TOTAL: 67	50
3042	30	42	15.7 X 19.7	Single	1900	LED LIGHT: 38 ANTI-FOG: 60 TOTAL: 94	50
				FS3	1150	LED LIGHT: 23 ANTI-FOG: 60 TOTAL: 81	50
3636	36	36	19.7 X 15.7	Single	1900	LED LIGHT: 38 ANTI-FOG: 60 TOTAL: 94	50
				FS3	1150	LED LIGHT: 23 ANTI-FOG: 60 TOTAL: 81	50
3648	36	48	17.7 X 21.7	Single	2250	LED LIGHT: 45 ANTI-FOG: 74 TOTAL: 115	50
				FS3	1350	LED LIGHT: 27 ANTI-FOG: 74 TOTAL: 98	50
3660	36	60	17.7 X 31.5	Single	2600	LED LIGHT: 52 ANTI-FOG: 108 TOTAL: 155	50
				FS3	1550	LED LIGHT: 31 ANTI-FOG: 108 TOTAL: 136	50
4040	40	40	19.7 X 19.7	Single	2100	LED LIGHT: 42 ANTI-FOG: 75 TOTAL: 113	50
				FS3	1250	LED LIGHT: 25 ANTI-FOG: 75 TOTAL: 98	50


APPROVED DIMMERS

- LUTRON SKYLARK SELV-300P-AL
- LUTRON Diva DVELV-300P-AL
- LUTRON(Diva) DVCL-153P
- LUTRON MACL-153M
- LUTRON MRF2-600M
- LUTRON MSCL-OP153M
- LUTRON(Lumea) LGCL-153P
- LEVITON 1C1705

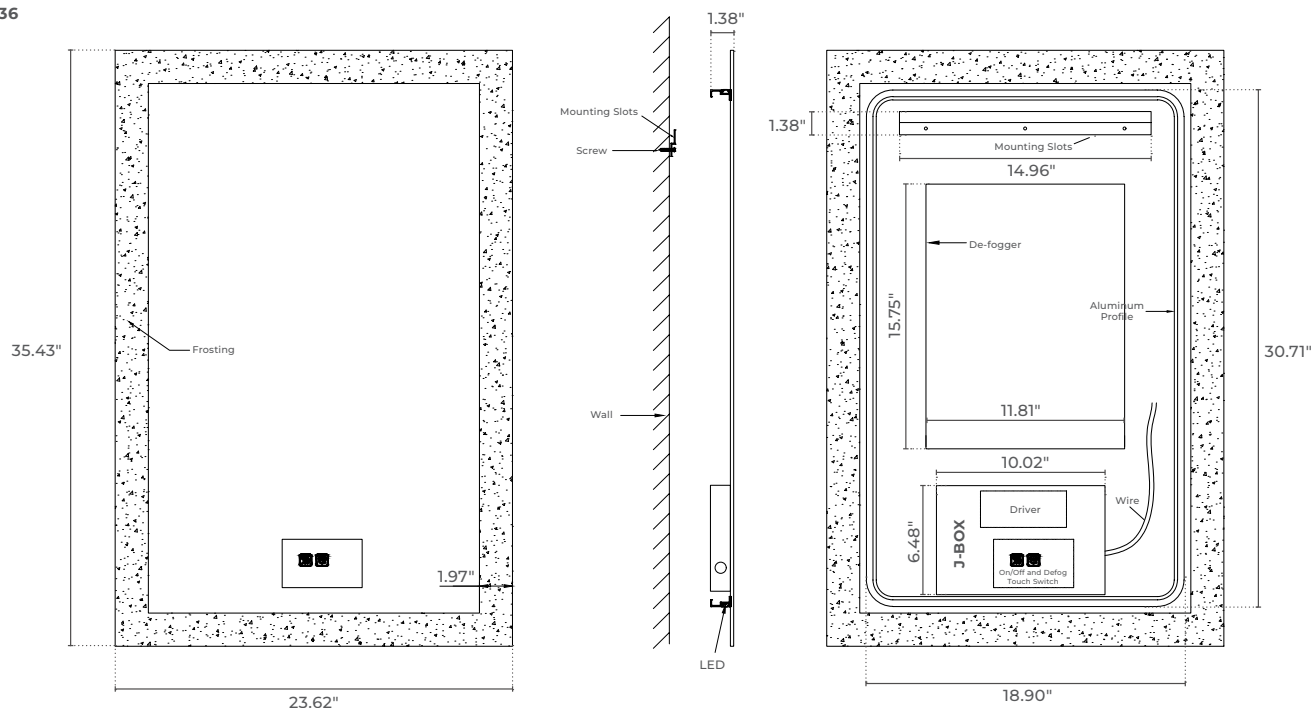
DIMENSIONS
24 X 36


DIMENSIONS


24 X 32

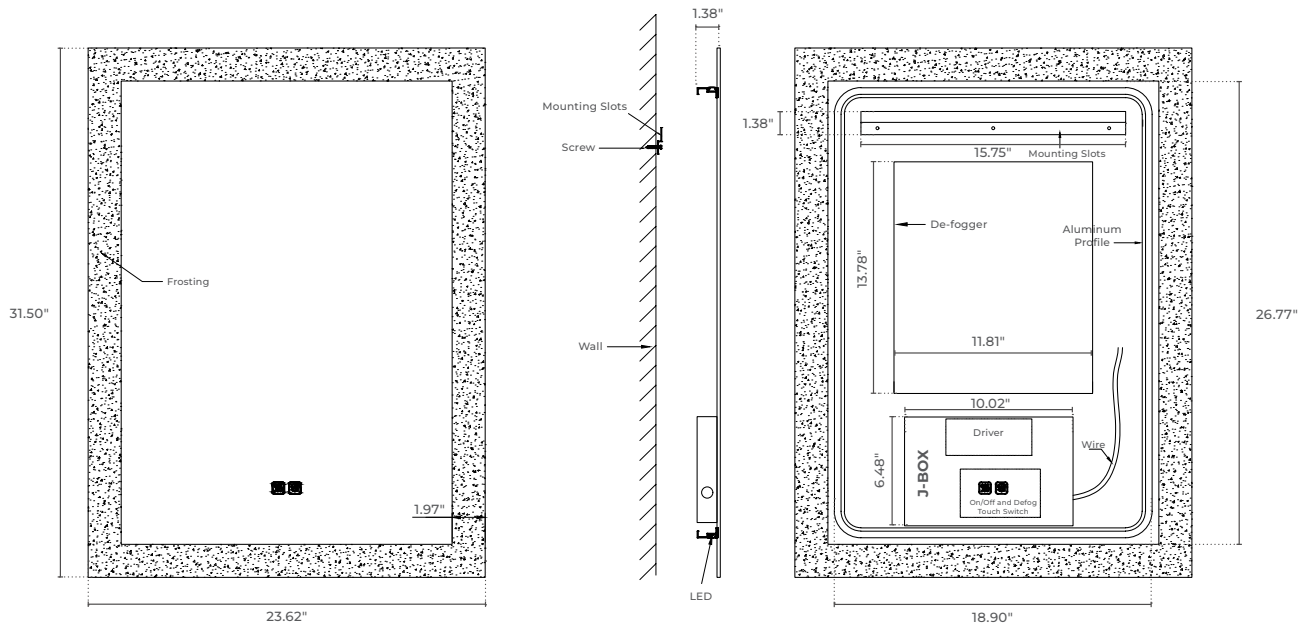

30 X 42

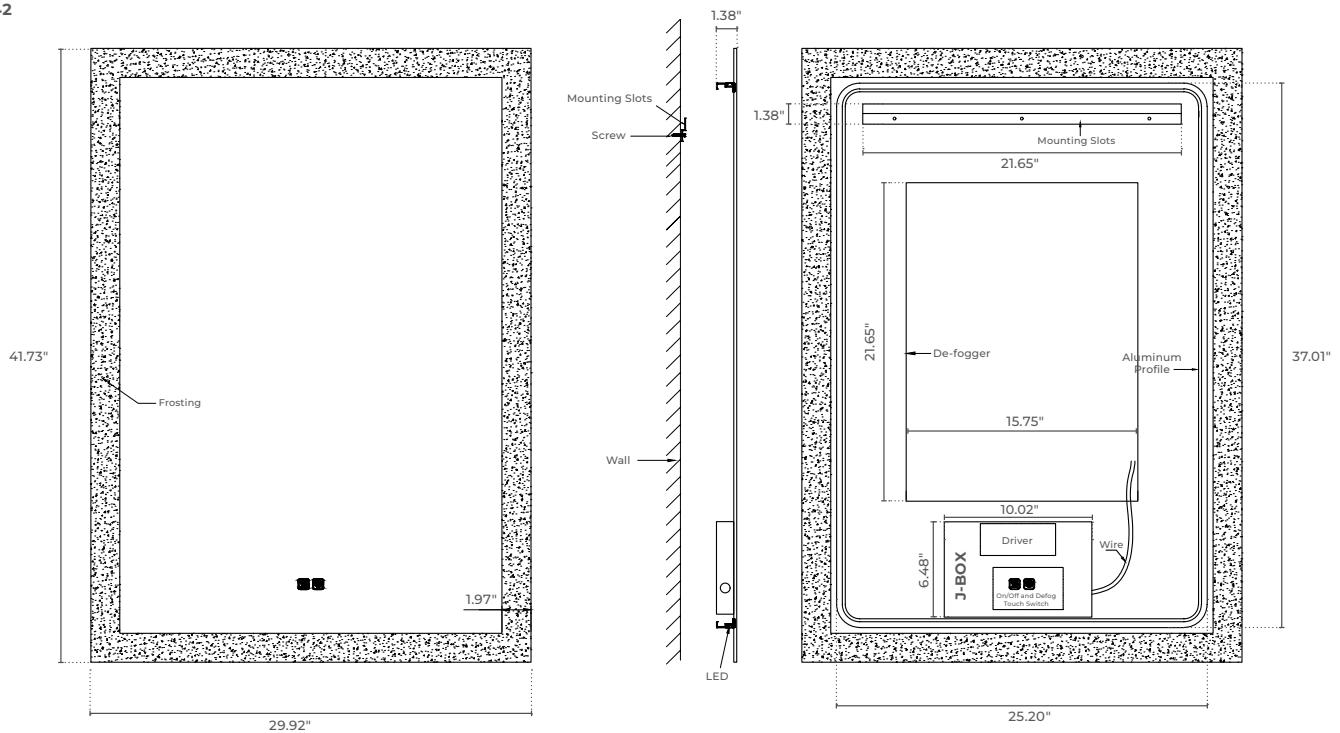


36 X 36

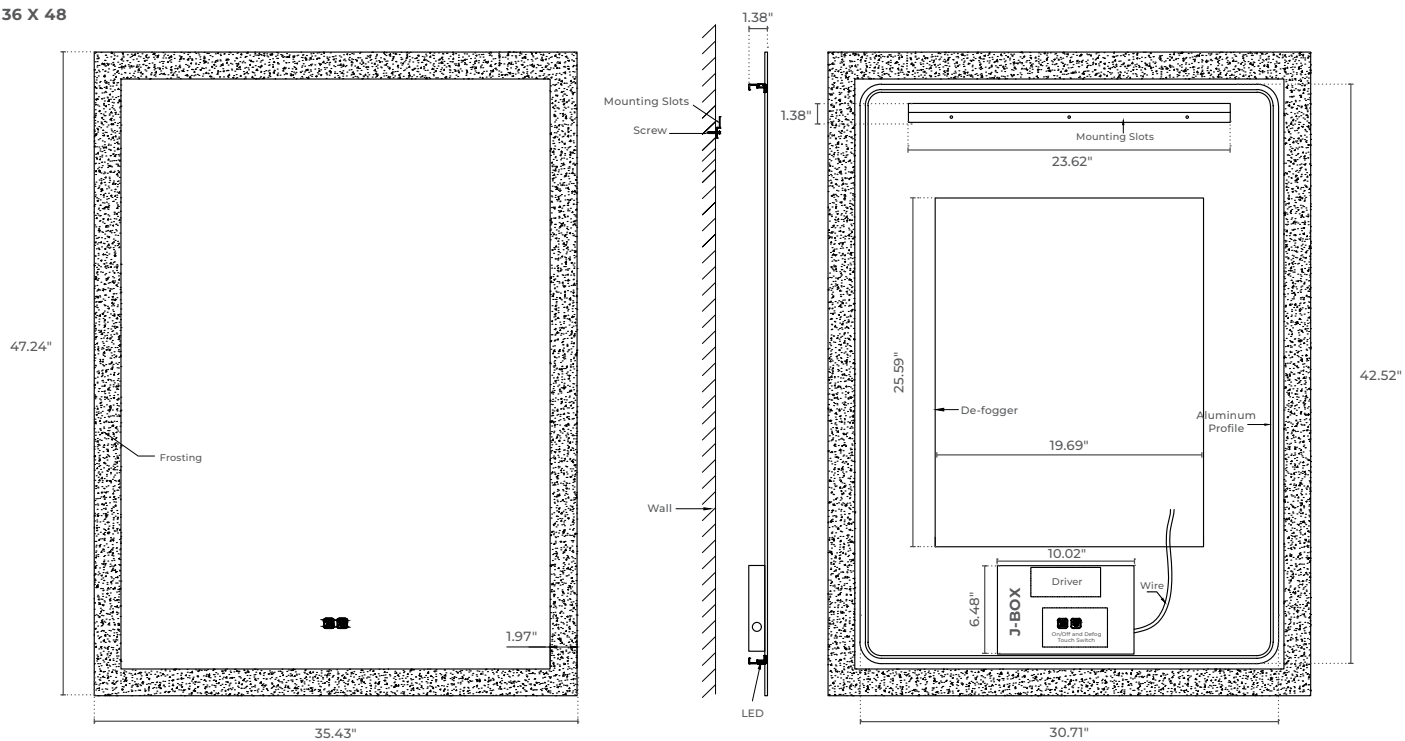

DIMENSIONS

36 X 60

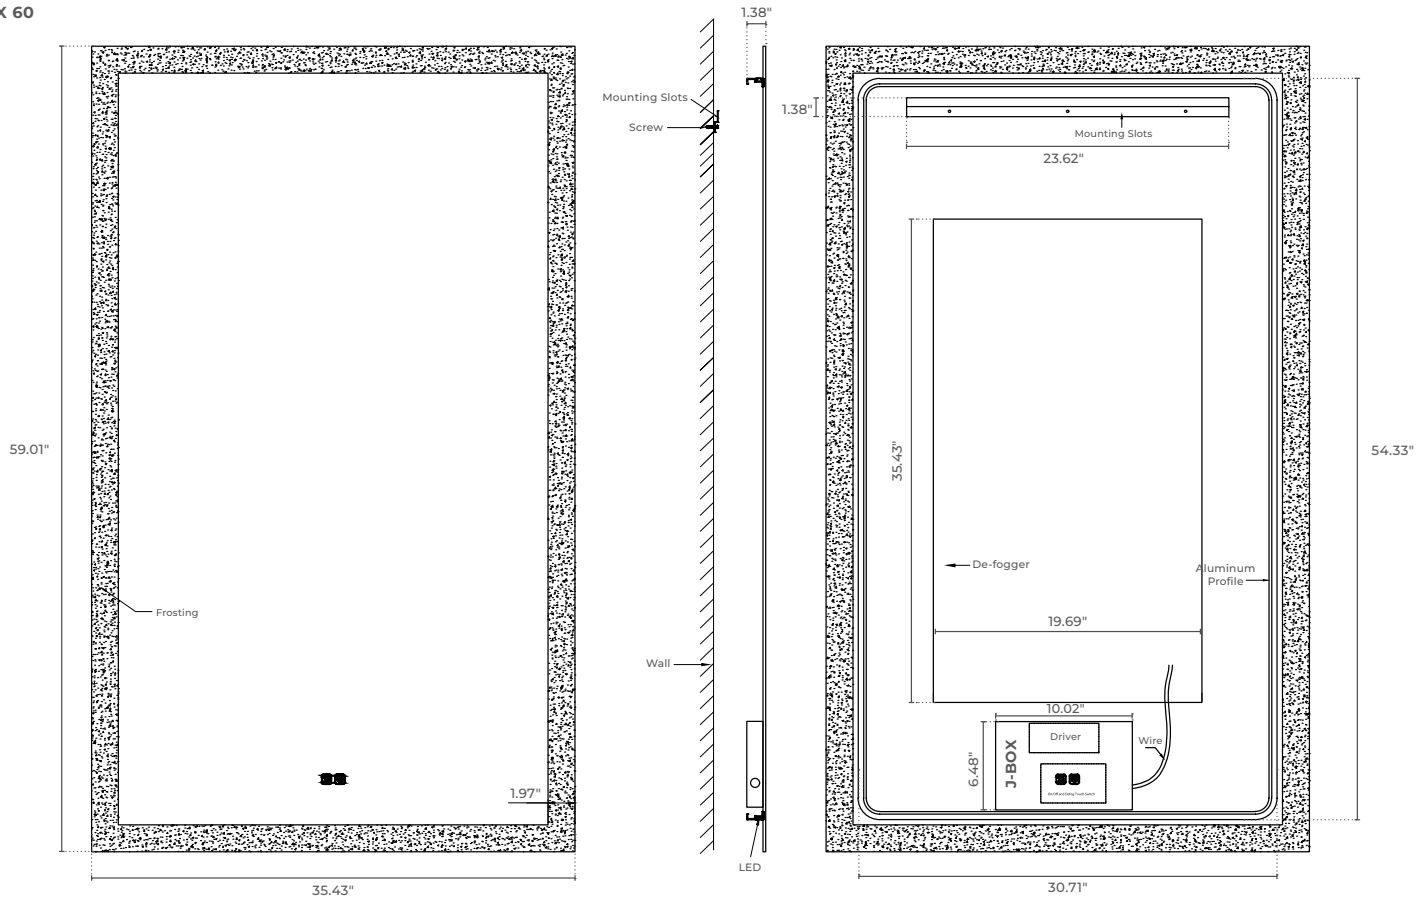

40 X 40

