

PROJECT DATE

COMMENTS



ENERGY CHART

SPEED SETTING	1	2	3	4	5	6
RPM	153	172	186	200	217	238
Amps	0.04	0.05	0.07	0.09	0.12	0.16
Wattage	6.10	8.60	11.40	15.80	21.50	37.30
CFM	7000	7200	7300	7500	7800	8000
CFM/Watts	0.89	0.89	0.9	0.91	0.92	0.93

ORDERING LOGIC

EX: MESOS-60-30-BK

FAMILY	SIZE Diameter	LIGHT KIT / CCT	HOUSING FINISH
MESOS	60 60"	30 3000K	BK Black
	72 72"	40 4000K	SN Satin Nickel
	84 84"	FS Field Selectable 3000K / 4000K / 6000K (With Remote Control or Wall Control)	
		NL No Light Kit CAP PROVIDED	

MESOS CEILING FAN LED

Mesos is an interior rated six blade ceiling fan with a 6-speed DC motor available in three sizes and two finish options. Mesos comes standard with a single CCT or 3CCT selectable LED light kit and a remote control.

- Garage
- Commercial
- Hospitality

PHYSICAL

Material	Metal
Blade Material	6 Aluminum Blades
Mounting	Suspended
Fan Diameter	60", 72", 84"
Source	LED
Housing Finish	Black or Satin Nickel
Blade Finish	Aluminum
Sloped Ceiling Accommodation	30°

PERFORMANCE

Warranty	10 years for motor, 2 years for light kit, blade, housing, and cap
Certification	Dry Location, ETL
Rated Life	L70 >36,300 hours
CCT	3000K, 4000K, 6000K, Field Selectable with Remote Control
Dimmable	Yes
Features	Low Noise
Reversible	Yes

ELECTRICAL

Light Kit Wattage	20W
Motor Wattage	35W
Total Wattage	55W
Voltage	120V
Motor	DC Motor
Control	6-Speed Remote Control Included

ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

EX: 6WC-DIM

ACCESSORIES

6WC-DIM	6-Speed Fan and Light Kit Dimmer Wall Control CLICK HERE FOR ACCESSORY SPECIFICATION SHEET
6WC-LD-OO-BK	6-Speed Fan and Light Kit On/Off Wall Control CLICK HERE FOR ACCESSORY SPECIFICATION SHEET

DOWNROD ORDERING LOGIC ON PAGE 2



DOWNROD ORDERING LOGIC (ORDER SEPARATELY)

EX: DR-G-SN-24


FAMILY	FINISH	LENGTH*
DR-G	SN Satin Nickel	24 24"
	BK Black	36 36"
	WH White	

ORDERING NOTES


- * Other downrod lengths available upon requests.
- * Standard downrod length is 8"

DIMENSIONS


MESOS-60
WITH LIGHT KIT

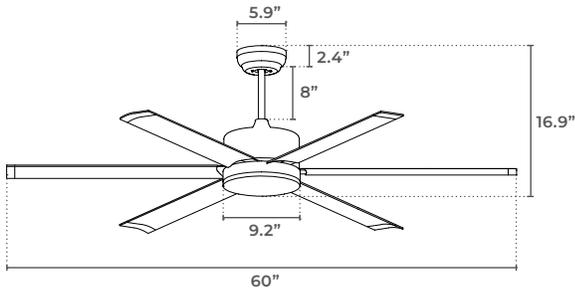


MESOS-60
WITHOUT LIGHT KIT

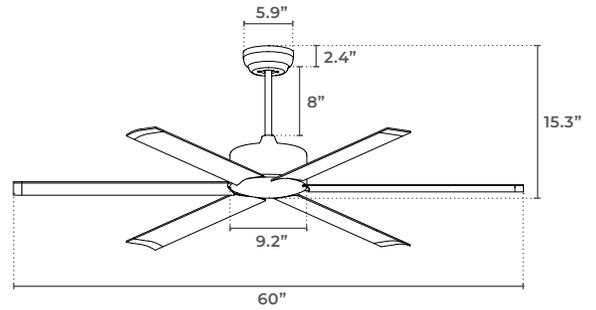


MESOS-72
WITH LIGHT KIT

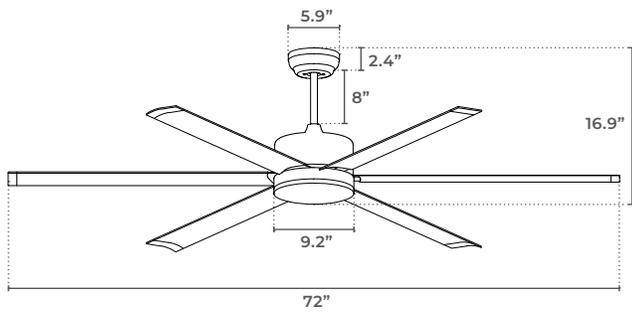


MESOS-72
WITHOUT LIGHT KIT

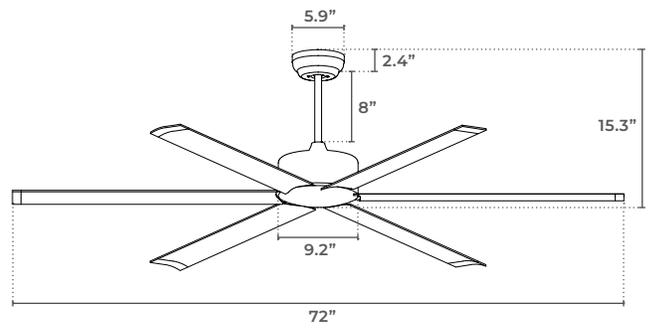

MESOS-84
WITH LIGHT KIT

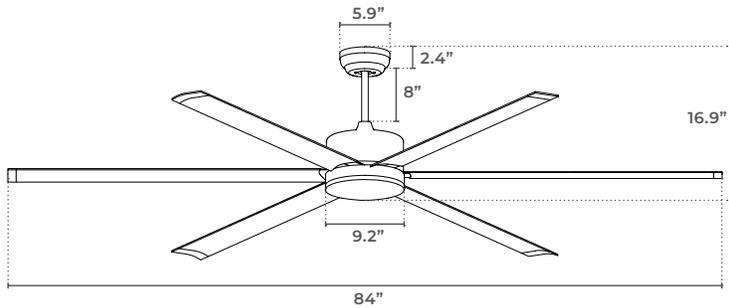

MESOS-84
WITHOUT LIGHT KIT

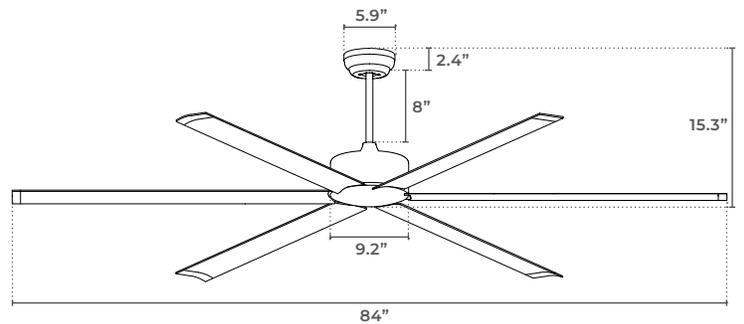

ADDITIONAL IMAGERY


Black Finish with No Light Kit



STANDARD REMOTE CONTROL


6RC-WH

DIMENSIONS

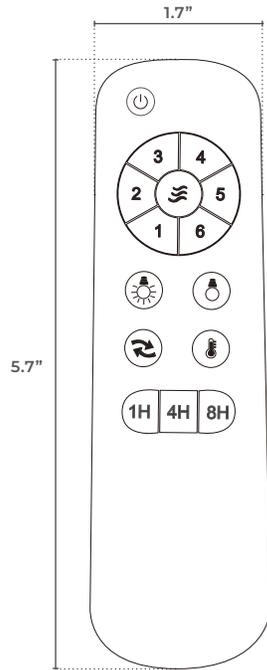

FUNCTIONS

1. Fan ON/OFF Function
2. Fan Speed Settings (1: Lowest / 6: Highest)
3. Natural Wind: Automatic Fan Speeds
4. Light ON Function
5. Light OFF Function
6. Reverse Fan Direction (Reverse Switch)
7. Thermostat:
 - When temperature is greater than 82.4°F(28°C), the fan starts at Speed 6
 - When temperature is greater than 73.4°F(23°C), the fan starts at Speed 3
 - When temperature is lower than 73.4°F(23°C), the fan stops
8. Timer (1 hr / 4 hr / 8 hr)

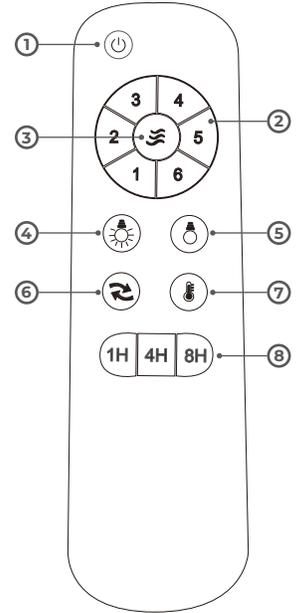


WALL CONTROL ACCESSORIES

6WC-LD-OO-BK

NOTE: 6WC-LD-OO-BK requires a non-standard 86x86mm electrical wall box.



6WC-LD-OO-BK DIMENSIONS

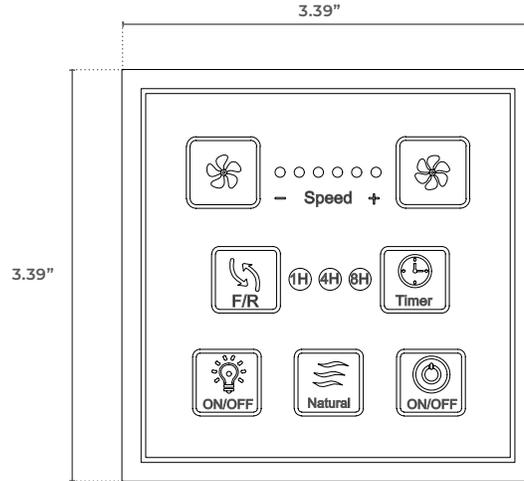

6WC-DIM



6WC-DIM DIMENSIONS

